



Marine Products
100 Ampere, 125/250V AC
 3 Pole 4 Wire
Ship-to-Shore Devices


IP67
SUITABILITY**100A 125/250V Ship-to-Shore Devices**

Description	Catalog Numbers
Yellow supertough nylon watertight plug has gasketed locking ring to make plug/receptacle interface watertight. Cord grip range is 1.000"-1.940" (25.4-49.3).	M4100P12
Gray nylon dockside receptacle has gasketed, spring-loaded cover. Closes automatically when not in use and is watertight when securely fastened. Mounting holes are 4 $\frac{7}{8}$ " (123.8) on centers. Mounting screws and gasket included.	M4100R12
Yellow supertough nylon watertight connector body for mating plug to connector interface on extension cords or adapters. Cord grip range is 1.000"-1.940" (25.4-49.3). Note: It cannot be mated to the shore power inlet.	M4100C12
Back box for inlets and receptacles has 15° angle section which can be installed in any of 4 positions. Box is cast aluminum with corrosion resistant gray alkyd-based enamel finish and 1 $\frac{1}{2}$ " N.P.T. hub which can be mounted for either top or bottom feed.	FW60100
Closure cap for 100A plugs and connector bodies that do not have a cap attached.	PC100
Replacement cover assembly; includes cover, arm, spring pin and assembly tool	CA100

Note: Periodic cleaning and lubrication (such as LPS-1 made by Holt Lloyd Corp.) of the pins and sleeves of these devices is necessary to enjoy years of optimal use.



FW60100

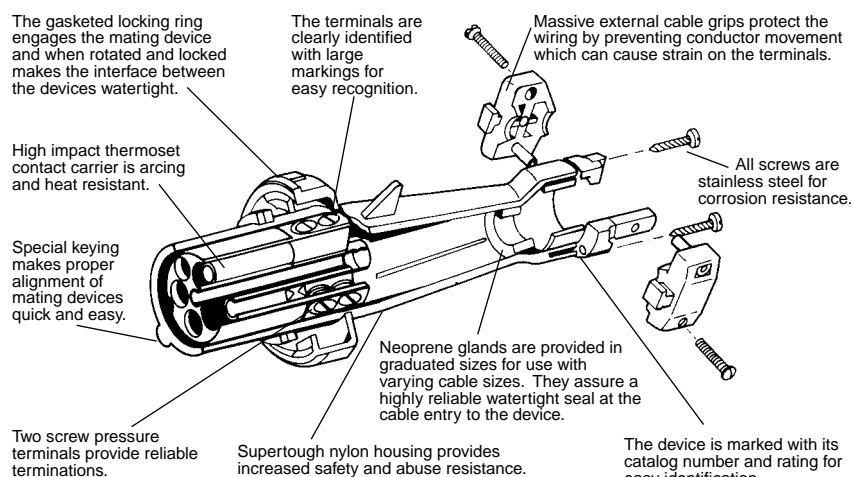100A Connector Body

Dimensions in Inches (mm)

www.hubbell-wiring.com



Wiring Device-Kellems

V-17



M4100P12



M4100R12



M4100C12



FW60100



PC100



CA100