

Straight Blade Devices
20A, 125V, 2 Pole, 3 Wire Grounding
Extra Heavy Duty Hospital Grade
SNAPConnect® Receptacle

HUBBELL

Features

- Audible SNAP, indicates solid connection
- Audible SNAP, indicates solid connection
- Reduces installation time
- Fully insulated design

Ordering Information

| Description | Device Color | UPC | Catalog Number |
|---|--------------|--------------|----------------|
| Hospital grade, Style Line® decorator with power indicating LED | Ivory | 783585248639 | SNAP21821L |

Listings


UL Listed to UL498 File No. E2186
Certified to CSA, C22.2, No. 42 File 285
Fed. Spec. W-C-596
NEMA® WD-6 Compliant

Specifications

| | |
|---------------------------------|-------------------|
| Face | Nylon |
| Base | PBT |
| Power Contacts | Brass |
| Ground Contacts | Brass |
| Mounting Strap | Galvanized steel |
| Automatic Self-grounding Staple | Stainless steel |
| Mounting Screws | Zinc plated steel |

Performance

| Electrical | |
|------------------------|---|
| Current Interrupting | Receptacle certified for current interrupting at full rated current |
| Dielectric Voltage | Withstands 2,000V minimum |
| Mechanical | |
| Product Identification | Ratings are a permanent part of the device |
| Environmental | |
| Flammability | UL 94V-2 |
| Operating Temperature | Maximum continuous 75°C; minimum -40°C (without impact) |

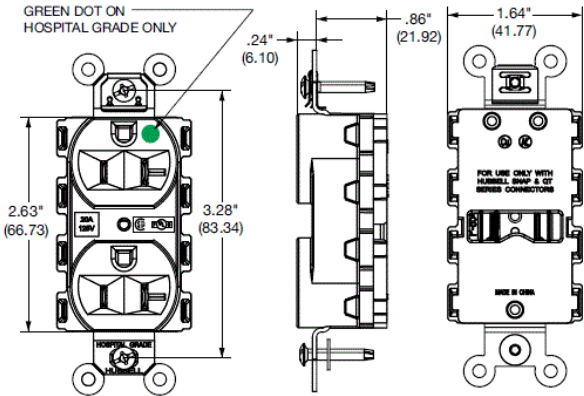

Accessories

Wallplate or Weatherproof Cover StyleLine® Decorator Opening

Resources

eCatalog

