

Form 7

Liquidtight Cover with Integral Gasket

Features

- Liquidtight Form 7 covers with integral gasket
- Unique wedge clamp cover design allows easy removal without damaging the conduit body
- Interchangeable with all major brand Form 7 conduit bodies
- Cover screws are stainless steel with beveled head to match chamfered screw hole, preventing water from entering the conduit body
- Domed cover design provides additional capacity
- UL standards 514A, cULus listed: E195124
- NEMA FB-1, NEMA 4X rated
- Federal Spec. A-A-50563
- IP65 protection



Application

- For use with Topaz Form 7 Conduit Bodies
- UL and cULus listed liquidtight Form 7 covers are suitable for use in the following hazardous locations under NEC 501-4(b), 502-4(a)(2) Class 1 Div. 2, Class II Div. 1 and 2, and Class III Div. 1




Standard Material

- Gray iron/ silicone seal / stainless steel screw

Standard Finish

- Environmentally friendly finish with superior corrosion resistant coating
- Exceeds 200 hour salt spray test

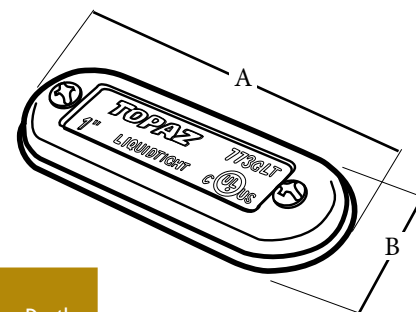

Catalog Number	UPC	Trade Size	Unit Ctn.	Ship Case	Weight/ Case	Dimensions		
						A	B	Depth
771GLT	87196	1/2"	10	100	36	3.7	1.3	0.6
772GLT	87197	3/4"	10	100	38	4.3	1.6	0.5
773GLT	87198	1"	5	50	29	5.0	1.8	0.6
774GLT	87199	1-1/4"	---	25	21	5.6	2.2	0.7
775GLT	87200	1-1/2"	---	20	21	6.1	2.4	0.7
776GLT	87201	2"	---	20	40	7.1	3.0	0.7
777GLT	87202	2-1/2-3"	---	10	20	9.1	4.3	0.8
779GLT	87203	3-1/2-4"	---	10	31	11.0	5.3	0.8