
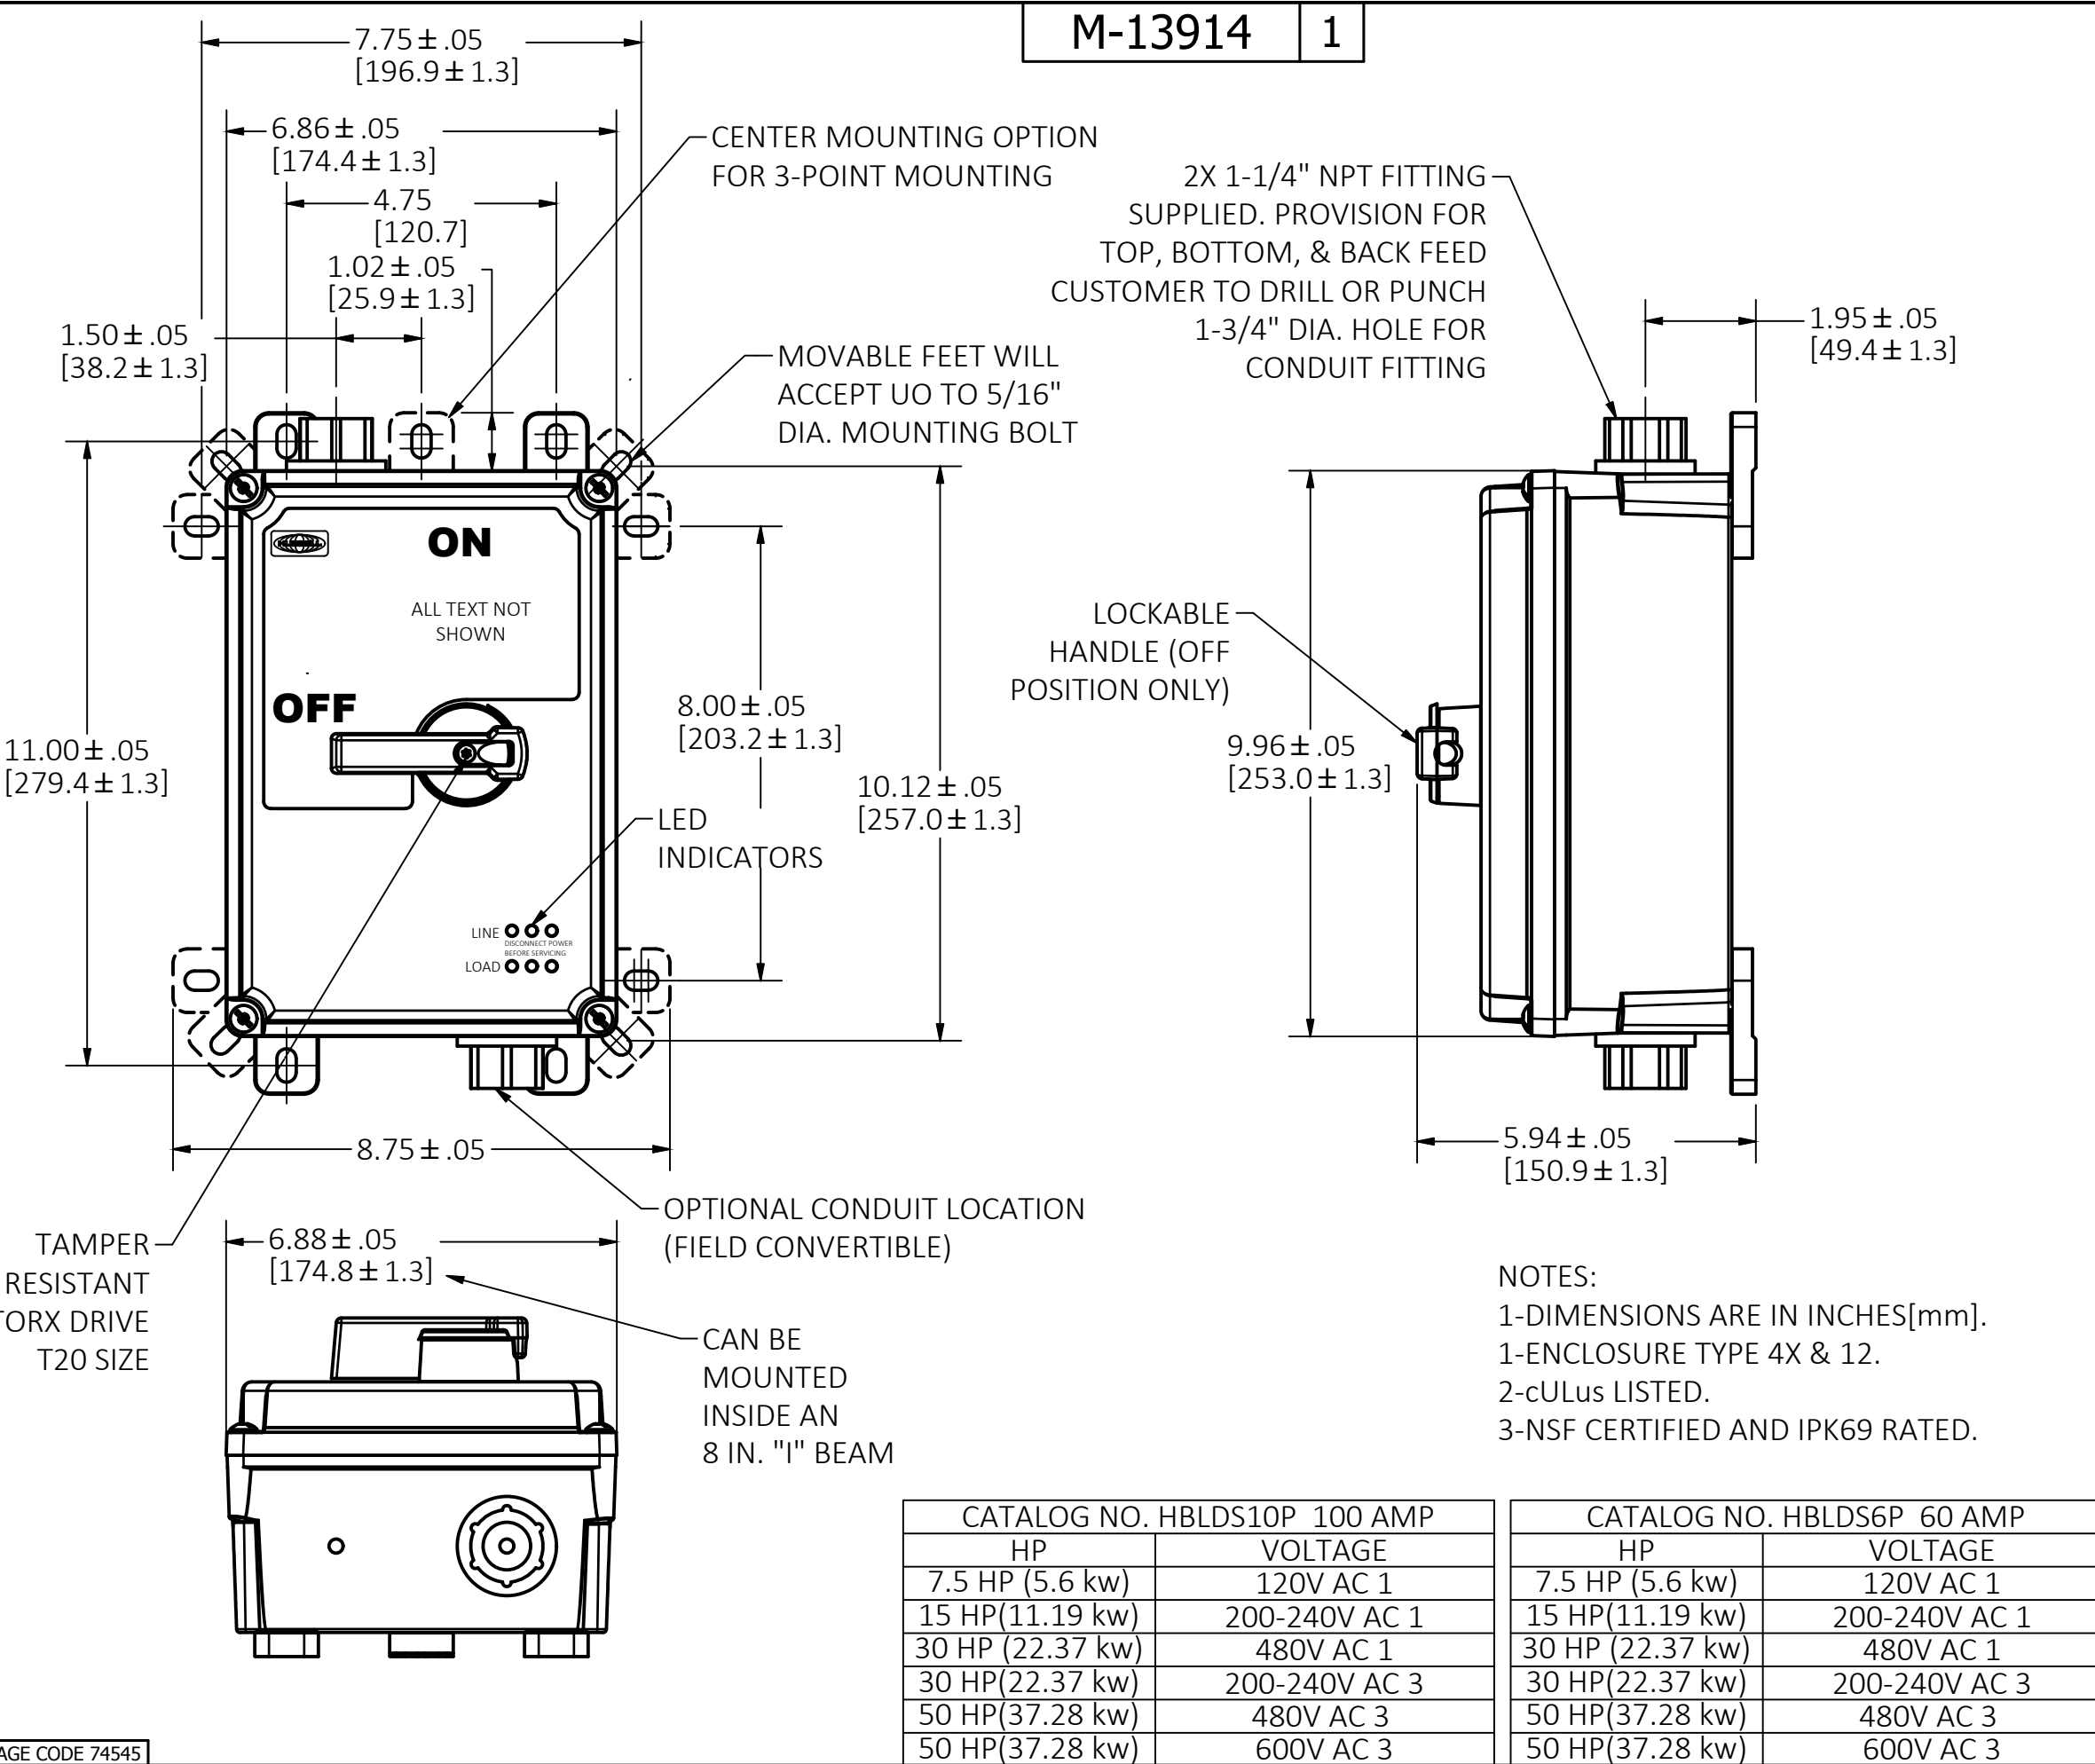


M-13914

1

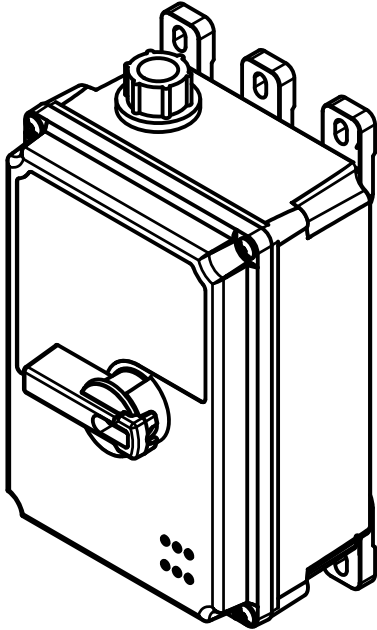

LIST OF PARTS			
DESCRIPTION	MATERIAL	FINISH	
ALL EXTERNAL PLASTIC PARTS	UV STABILIZED POLYESTER BLEND		
ALL EXTERNAL SCREWS	STAINLESS STEEL		
THREADED HUB	DIE CAST		
INSULATED THROAT	ZINC		
GREEN LEDS			
 CATALOG NO. HBLDS6P NOT SHOWN TO SCALE			
1	RELEASED PER DCN24232	CAC	8/08/18
REV	DESCRIPTION	APP	DATE
THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE. DIMENSIONS ARE IN INCHES [mm].			
TITLE			
DIMENSION SHEET FOR 60A CIRCUIT LOCK DISCONNECT SWITCH W/LED SWITCH			
		WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT	
TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ± .01 .XXX= ± .005 ANGLE TOL. ±2°		DR. BY CAC	SCALE 1 / 3
		CHK. BY CAC	DATE 07/16/18

DIMENSION SHEET FOR CAT. NO.
HBLDS6P, HBLDS10P

B

M-13914

1

CATALOG NO. HBLDS10P 100 AMP	
HP	VOLTAGE
7.5 HP (5.6 kw)	120V AC 1
15 HP(11.19 kw)	200-240V AC 1
30 HP (22.37 kw)	480V AC 1
30 HP(22.37 kw)	200-240V AC 3
50 HP(37.28 kw)	480V AC 3
50 HP(37.28 kw)	600V AC 3

CATALOG NO. HBLDS6P 60 AMP	
HP	VOLTAGE
7.5 HP (5.6 kw)	120V AC 1
15 HP(11.19 kw)	200-240V AC 1
30 HP (22.37 kw)	480V AC 1
30 HP(22.37 kw)	200-240V AC 3
50 HP(37.28 kw)	480V AC 3
50 HP(37.28 kw)	600V AC 3