

**Straight Blade Devices**  
**20 Amp, 125 Volt, 2-Pole, 3-Wire**  
**SNAPConnect® Extra Heavy Duty Receptacle**

**HUBBELL**

**Features**

- Audible SNAP, indicates solid connection
- Reduces installation time
- IG, Tamper-Resistant, LED Indicator

**Ordering Information**

Description	Device Color	UPC Number	Catalog Number
Standard Duplex	Orange	783585552958	SNAP5362IGLTRA




**Listings**

UL Listed to UL498 File No. E2445  
Certified to CSA, C22.2, No. 42 File 544  
Fed. Spec. W-C-855  
NEMA® WD-6 Compliant

**Specifications**

Face	Nylon
Base	Nylon
Line Contact	Brass
Ground Contact	Brass

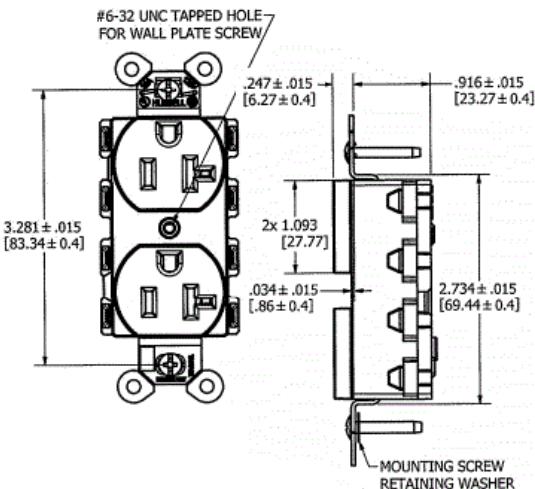

**Performance**

<b>Electrical</b>	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum
<b>Mechanical</b>	
Product Identification	Ratings are a permanent part of the device
<b>Environmental</b>	
Flammability	UL 94V-2
Operating Temperature	Maximum continuous 75°C; minimum -40°C (without impact)

**Complementary Products**

Wallplate or Weatherproof Cover  
Opening

**Online Resources**

Customer Sales Drawing  
eCatalog  
Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.