

Fire-Rated Poke-Throughs

SystemOne Flush

4-Inch Diameter Core Hole

HUBBELL

Features

- One 3/4" EMT for Power, Two 3/4" EMT for Low Voltage
- S1CFCAL, Aluminum Powder Coat Finish Cover Included
- S1SP4X4 sub-plate Included
- Junction Box Included



Ordering Information

- Fully Assembled Fitting, Cover and Sub-Plate

Catalog Number	UPC Number	Cover Series	Core Hole Diameter
S1PT4X4ALJ	783585373034	S1CFC	4-Inch


Minimum Deck Thickness	Connection Type
2.25" Over Metal Deck	Flush

Standards

cULus Listed
UL scrub water compliant
ADA Compliant

Specifications

Cover load rating	300 lbs. static load through 3" diameter mandrel
Access cover material	Die cast aluminum
Fire Rating	1 - 4 Hour Fire Rating

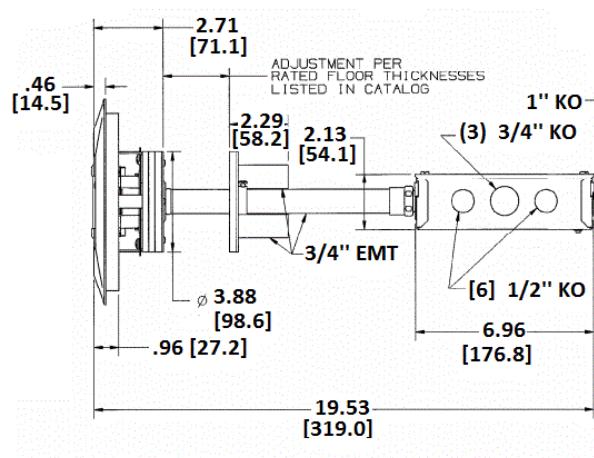

Accessories

4" Pre-Pour Tube, removed need for core hold drilling **S1R4PPT**

Online Resources

Customer Use Drawing
eCatalog
Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

