

Straight Blade Devices

20A, 125V, 2 Pole, 3 Wire Grounding

Extra Heavy Duty Hospital Grade SNAPConnect® Receptacle

HUBBELL

Features

- Audible SNAP, indicates solid connection
- Reduces installation time
- Fully insulated design

Ordering Information

Description	Device Color	UPC Number	Catalog Number
Hospital grade, Style Line® decorator with power indicating LED	Brown	783585248622	SNAP2182L

Listings

UL Listed to UL498 File No. E2186

CSA Certified


Fed. Spec. W-C-596

NEMA® WD-6 Compliant



Specifications

Face	Nylon
Base	PBT
Power Contacts	Brass
Ground Contacts	Brass
Mounting Strap	Galvanized steel
Automatic Self-grounding Staple	Stainless steel
Mounting Screws	Zinc plated steel

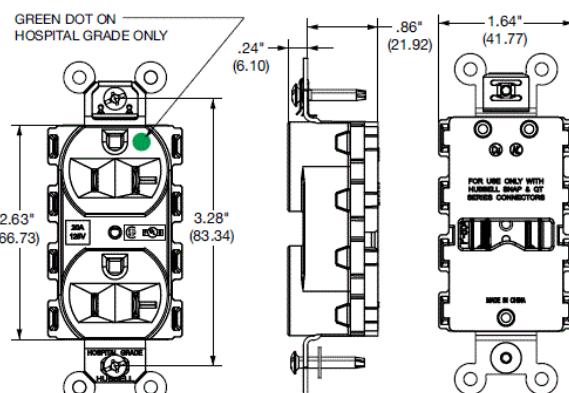

Performance

Electrical

Current Interrupting

Receptacle certified for current interrupting at full rated current

Dielectric Voltage

Withstands 2,000V minimum

Mechanical

Product Identification

Ratings are a permanent part of the device

Environmental

Flammability

UL 94V-2

Operating Temperature

Maximum continuous 75°C; minimum -40°C (without impact)

Complementary Products

Wallplate or Weatherproof Cover

StyleLine® Decorator Opening

Online Resources

Customer Sales Drawings

eCatalog

Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

