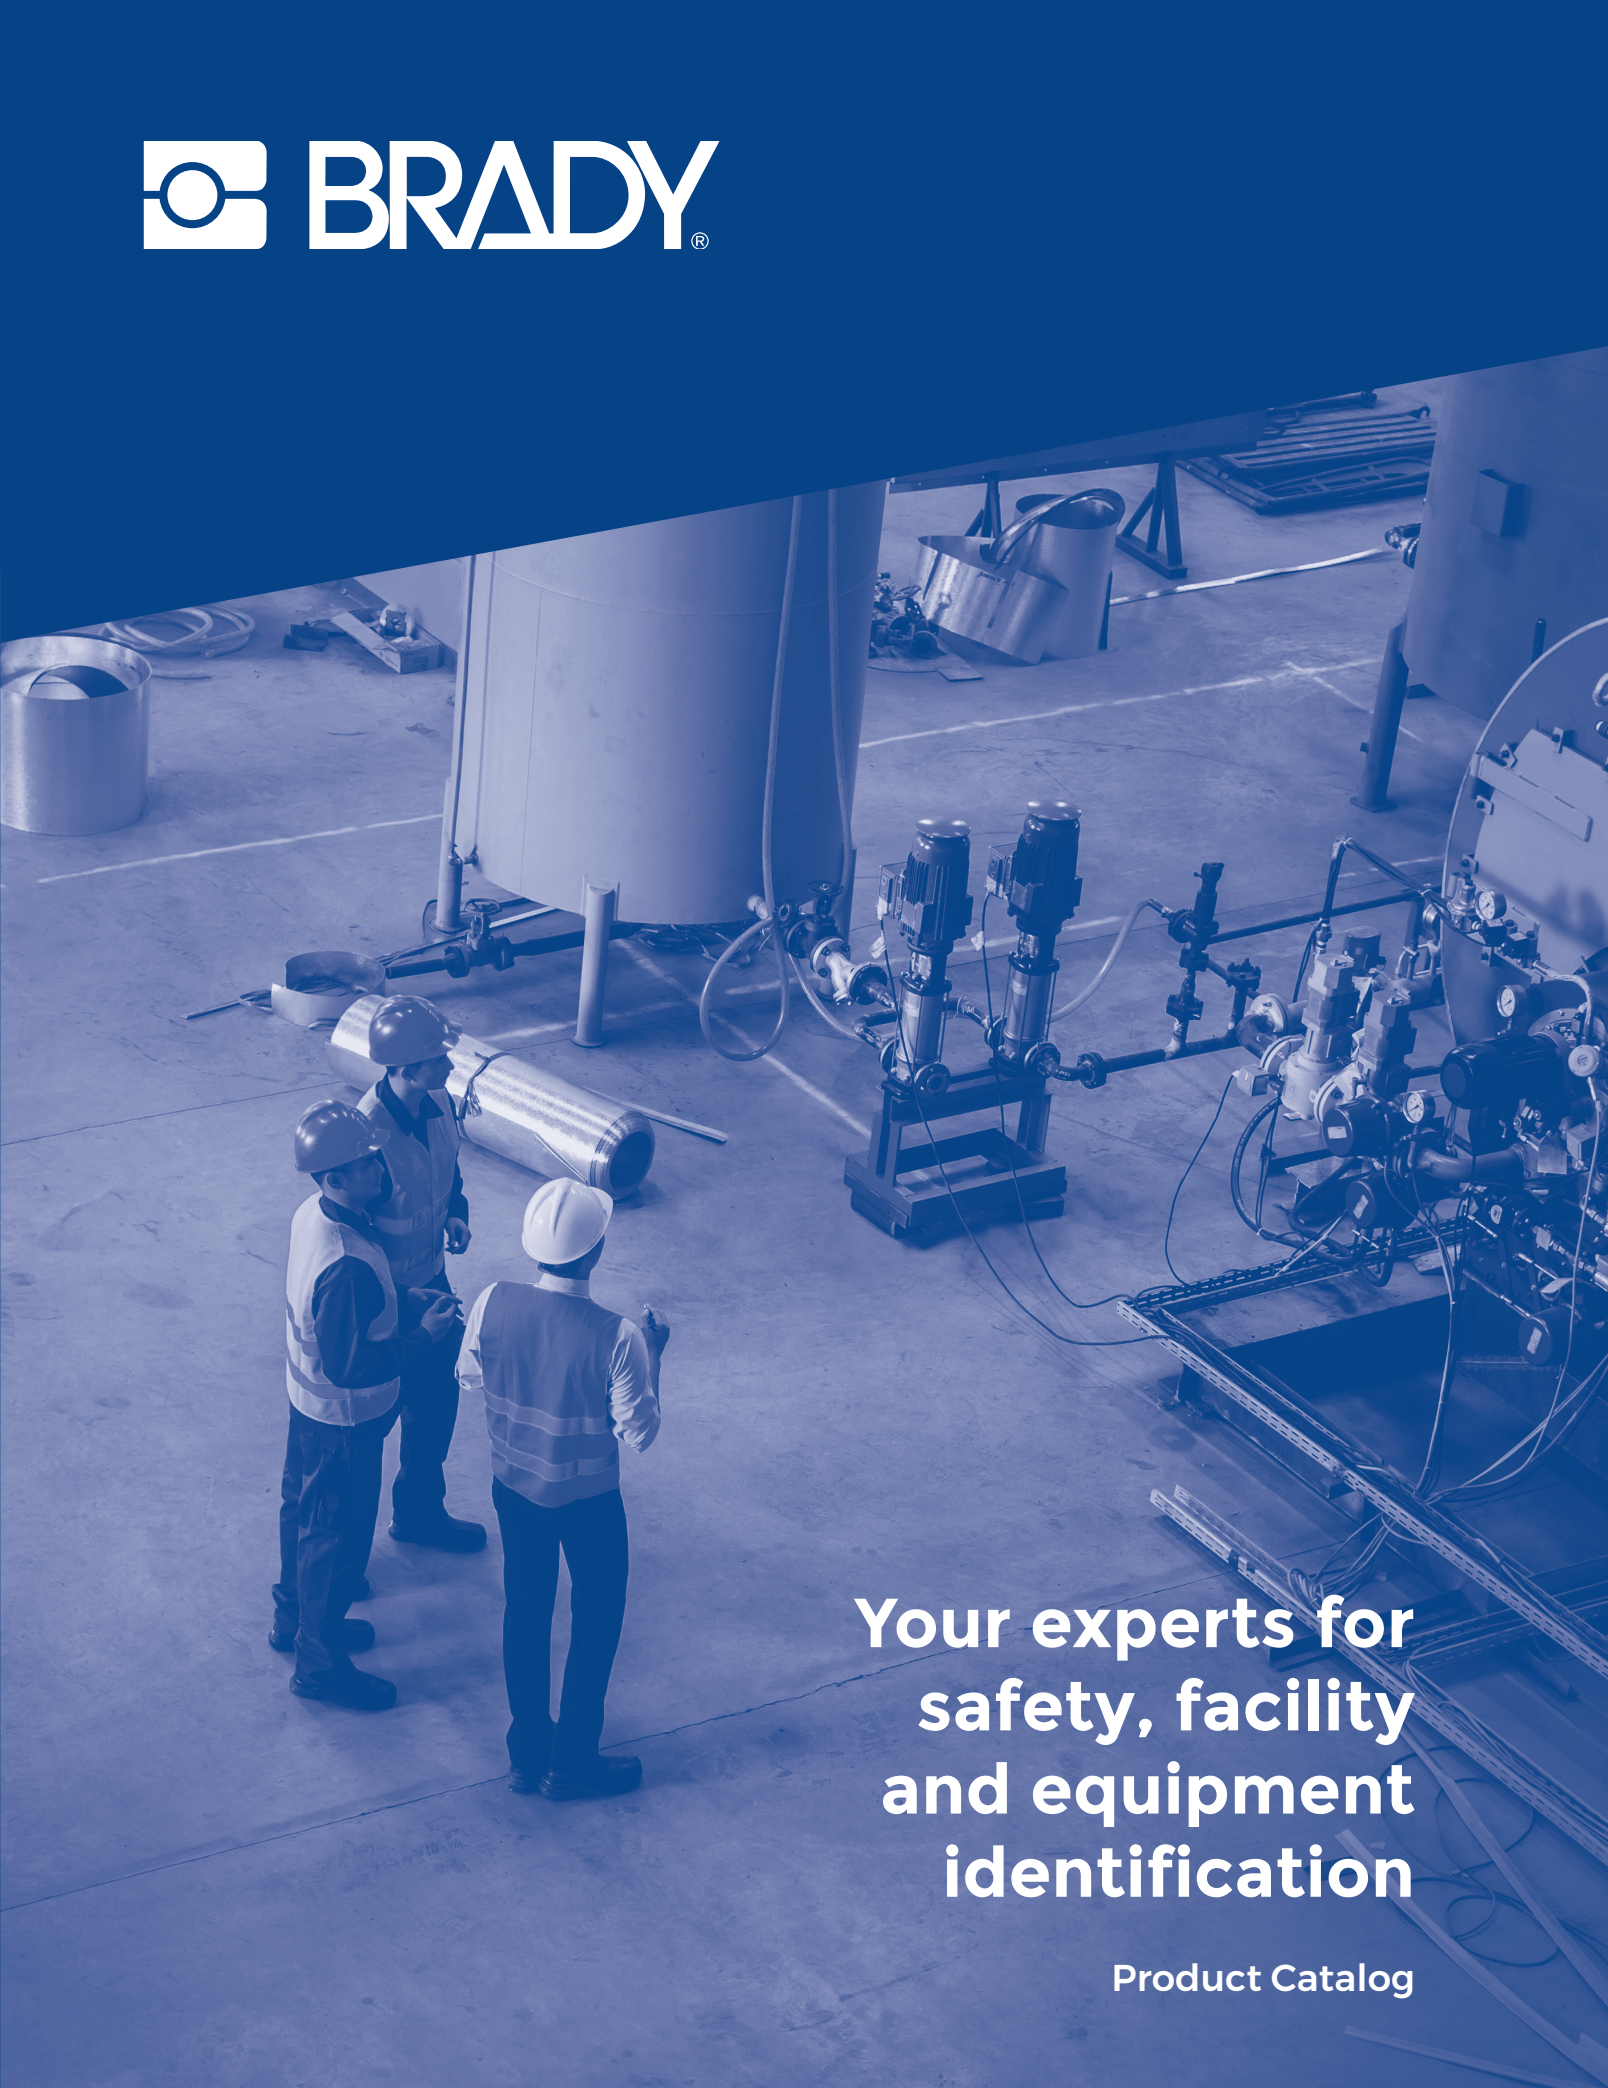


The background of the entire page is a blue-tinted photograph of an industrial facility. Three workers in hard hats and safety vests are in the lower-left foreground, looking at a large piece of equipment. In the center, there are two vertical pumps on a stand. To the right, a complex system of pipes, valves, and machinery is visible. Large cylindrical tanks are in the background.

**Your experts for
safety, facility
and equipment
identification**

Product Catalog

B30- and B33-Series Materials

BradyID.com/s36

Raised Profile - Engraved Plate Substitute Labels (B-593)

Push Button Style

- High gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.70 mm thick)
- High-performance, low-cost substitute to engraved plates – costs up to 80% less
- 10-year outdoor durability rating
- On-demand labeling: prints out in fewer than 4 seconds
- 5 push button sizes (including keyed and non-keyed 22.5 mm and 30.5 mm hole diameters)

Service temp: -4° F to 212° F
Application temp: 50° F to 212° F
Agency approvals:




Figure 18a




Figure 18b
(without key hole)



Fits Printers	Figure	Catalog #	B#	Color	Label Height A Inch (mm)	Label Width B Inch (mm)	Hole Diameter C Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
All*	Fig. 18a	B30EP-167-593-WT	B-593	White	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R6000
All*	Fig. 18b	B30EP-167U-593-WT	B-593	White	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R6000
All*	Fig. 18a	B30EP-169-593-WT	B-593	White	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	1	190	B30-R6000
All*	Fig. 18a	B30EP-168-593-WT	B-593	White	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	1	180	B30-R6000
All*	Fig. 18a	B30EP-170-593-WT	B-593	White	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	1	145	B30-R6000
All*	Fig. 18a	B30EP-167-593-YL	B-593	Yellow	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R6000
All*	Fig. 18b	B30EP-167U-593-YL	B-593	Yellow	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R6000
All*	Fig. 18a	B30EP-169-593-YL	B-593	Yellow	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	1	190	B30-R6000
All*	Fig. 18a	B30EP-168-593-YL	B-593	Yellow	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	1	180	B30-R6000
All*	Fig. 18a	B30EP-170-593-YL	B-593	Yellow	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	1	145	B30-R6000
All*	Fig. 18a	B30EP-167-593-BK	B-593	Black	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R4400-WT
All*	Fig. 18b	B30EP-167U-593-BK	B-593	Black	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R4400-WT
All*	Fig. 18a	B30EP-169-593-BK	B-593	Black	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	1	190	B30-R4400-WT
All*	Fig. 18a	B30EP-168-593-BK	B-593	Black	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	1	180	B30-R4400-WT
All*	Fig. 18a	B30EP-170-593-BK	B-593	Black	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	1	145	B30-R4400-WT
All*	Fig. 18a	B30EP-167-593-GN	B-593	Green	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R4400-WT
All*	Fig. 18b	B30EP-167U-593-GN	B-593	Green	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R4400-WT
All*	Fig. 18a	B30EP-169-593-GN	B-593	Green	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	1	190	B30-R4400-WT
All*	Fig. 18a	B30EP-168-593-GN	B-593	Green	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	1	180	B30-R4400-WT
All*	Fig. 18a	B30EP-170-593-GN	B-593	Green	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	1	145	B30-R4400-WT
All*	Fig. 18a	B30EP-167-593-RD	B-593	Red	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R4400-WT
All*	Fig. 18b	B30EP-167U-593-RD	B-593	Red	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1	200	B30-R4400-WT
All*	Fig. 18a	B30EP-169-593-RD	B-593	Red	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	1	190	B30-R4400-WT
All*	Fig. 18a	B30EP-168-593-RD	B-593	Red	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	1	180	B30-R4400-WT
All*	Fig. 18a	B30EP-170-593-RD	B-593	Red	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	1	145	B30-R4400-WT

U.S. Patent No. US8475914B2; US9005729B2.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

Raised Profile - Engraved Plate Substitute Labels (B-593)

Rectangular Style

- High gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.70 mm thick)
- High-performance, low-cost substitute to engraved plates – costs up to 80% less
- 10-year outdoor durability rating
- On-demand labeling: prints out in fewer than 4 seconds
- Ideal for inside-panel backer board labels and front-of-enclosure labeling

Service temp: -4° F to 212° F
Application temp: 50° F to 212° F
Agency approvals:





Figure 18c



Fits Printers	Figure	Catalog #	B#	Color	Label Height A Inch (mm)	Label Width B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
All*	Fig. 18c	B30EP-171-593-WT	B-593	White	0.490 (12.5)	1.060 (26.9)	1	500	B30-R6000
All*	Fig. 18c	B30EP-172-593-WT	B-593	White	0.590 (15.0)	1.770 (45.0)	1	450	B30-R6000
All*	Fig. 18c	B30EP-175-593-WT	B-593	White	0.750 (19.1)	3.000 (76.2)	1	375	B30-R6000
All*	Fig. 18c	B30EP-173-593-WT	B-593	White	1.000 (25.4)	2.000 (50.8)	1	300	B30-R6000
All*	Fig. 18c	B30EP-174-593-WT	B-593	White	1.000 (25.4)	4.000 (101.6)	1	300	B30-R6000
All*	Fig. 18c	B30EP-176-593-WT	B-593	White	1.000 (25.4)	3.000 (76.2)	1	300	B30-R6000
All*	Fig. 18c	B30EP-177-593-WT	B-593	White	2.500 (63.5)	3.000 (76.2)	1	125	B30-R6000
All*	Fig. 18c	B30EP-171-593-YL	B-593	Yellow	0.490 (12.5)	1.060 (26.9)	1	500	B30-R6000
All*	Fig. 18c	B30EP-172-593-YL	B-593	Yellow	0.590 (15.0)	1.770 (45.0)	1	450	B30-R6000
All*	Fig. 18c	B30EP-175-593-YL	B-593	Yellow	0.750 (19.1)	3.000 (76.2)	1	375	B30-R6000
All*	Fig. 18c	B30EP-173-593-YL	B-593	Yellow	1.000 (25.4)	2.000 (50.8)	1	300	B30-R6000
All*	Fig. 18c	B30EP-174-593-YL	B-593	Yellow	1.000 (25.4)	4.000 (101.6)	1	300	B30-R6000
All*	Fig. 18c	B30EP-176-593-YL	B-593	Yellow	1.000 (25.4)	3.000 (76.2)	1	300	B30-R6000
All*	Fig. 18c	B30EP-177-593-YL	B-593	Yellow	2.500 (63.5)	3.000 (76.2)	1	125	B30-R6000
All*	Fig. 18c	B30EP-171-593-BK	B-593	Black	0.490 (12.5)	1.060 (26.9)	1	500	B30-R4400-WT
All*	Fig. 18c	B30EP-172-593-BK	B-593	Black	0.590 (15.0)	1.770 (45.0)	1	450	B30-R4400-WT
All*	Fig. 18c	B30EP-175-593-BK	B-593	Black	0.750 (19.1)	3.000 (76.2)	1	375	B30-R4400-WT
All*	Fig. 18c	B30EP-173-593-BK	B-593	Black	1.000 (25.4)	2.000 (50.8)	1	300	B30-R4400-WT
All*	Fig. 18c	B30EP-174-593-BK	B-593	Black	1.000 (25.4)	4.000 (101.6)	1	300	B30-R4400-WT
All*	Fig. 18c	B30EP-176-593-BK	B-593	Black	1.000 (25.4)	3.000 (76.2)	1	300	B30-R4400-WT
All*	Fig. 18c	B30EP-177-593-BK	B-593	Black	2.500 (63.5)	3.000 (76.2)	1	125	B30-R4400-WT
All*	Fig. 18c	B30EP-171-593-GN	B-593	Green	0.490 (12.5)	1.060 (26.9)	1	500	B30-R4400-WT
All*	Fig. 18c	B30EP-172-593-GN	B-593	Green	0.590 (15.0)	1.770 (45.0)	1	450	B30-R4400-WT
All*	Fig. 18c	B30EP-175-593-GN	B-593	Green	0.750 (19.1)	3.000 (76.2)	1	375	B30-R4400-WT
All*	Fig. 18c	B30EP-173-593-GN	B-593	Green	1.000 (25.4)	2.000 (50.8)	1	300	B30-R4400-WT
All*	Fig. 18c	B30EP-174-593-GN	B-593	Green	1.000 (25.4)	4.000 (101.6)	1	300	B30-R4400-WT
All*	Fig. 18c	B30EP-176-593-GN	B-593	Green	1.000 (25.4)	3.000 (76.2)	1	300	B30-R4400-WT
All*	Fig. 18c	B30EP-177-593-GN	B-593	Green	2.500 (63.5)	3.000 (76.2)	1	125	B30-R4400-WT
All*	Fig. 18c	B30EP-171-593-RD	B-593	Red	0.490 (12.5)	1.060 (26.9)	1	500	B30-R4400-WT
All*	Fig. 18c	B30EP-172-593-RD	B-593	Red	0.590 (15.0)	1.770 (45.0)	1	450	B30-R4400-WT
All*	Fig. 18c	B30EP-173-593-RD	B-593	Red	1.000 (25.4)	2.000 (50.8)	1	300	B30-R4400-WT
All*	Fig. 18c	B30EP-174-593-RD	B-593	Red	1.000 (25.4)	4.000 (101.6)	1	300	B30-R4400-WT
All*	Fig. 18c	B30EP-171-593-SL	B-593	Silver	0.490 (12.5)	1.060 (26.9)	1	500	B30-R6000
All*	Fig. 18c	B30EP-172-593-SL	B-593	Silver	0.590 (15.0)	1.770 (45.0)	1	450	B30-R6000
All*	Fig. 18c	B30EP-173-593-SL	B-593	Silver	1.000 (25.4)	2.000 (50.8)	1	300	B30-R6000
All*	Fig. 18c	B30EP-174-593-SL	B-593	Silver	1.000 (25.4)	4.000 (101.6)	1	300	B30-R6000

U.S. Patent No. US8475914B2; US9005729B2.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

BradyID.com/s36

Polyester Labels

(B-422, B-423, B-430, B-432, B-483, B-484A and B-489)

- For product, circuit board and component ID as well as for general purpose industrial identification
- Ideal for textured and curved surfaces

B-423: Service temp: -94° F to 248° F Agency approvals:   
 B-430: Service temp: -40° F to 212° F Agency approvals:   
 B-432: Service temp: -40° F to 212° F Agency approvals:   
 B-483: Service temp: -94° F to 248° F Agency approvals:   
 B-484A: Service temp: -40° F to 240° F Agency approvals:   
 B-489: Service temp: -94° F to 248° F Agency approvals:   



Figure 1




Figure 2




Figure 3




Figure 4

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Standard adhesive (B-423 gloss white):									
i3300, BBP33	Fig. 4	B33-11-423	B-423	Gloss White	0.250 (6.4)	0.250 (6.4)	12	15000	B30-R6000
i3300, BBP33	Fig. 1	B33-38-423	B-423	Gloss White	0.375 (9.5)	0.375 (9.5)	9	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-149-423	B-423	Gloss White	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-1-423	B-423	Gloss White	0.750 (19.1)	0.250 (6.4)	4	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-46-423	B-423	Gloss White	0.750 (19.1)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-49-423	B-423	Gloss White	0.900 (22.9)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-103-423	B-423	Gloss White	1.000 (25.4)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-3-423	B-423	Gloss White	1.000 (25.4)	0.375 (9.5)	3	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-5-423	B-423	Gloss White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-43-423	B-423	Gloss White	1.250 (31.8)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-29-423	B-423	Gloss White	1.250 (31.8)	0.375 (9.5)	2	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-45-423	B-423	Gloss White	1.500 (38.1)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-72-423	B-423	Gloss White	1.750 (44.5)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-53-423	B-423	Gloss White	2.000 (50.8)	0.500 (12.7)	1	2500	B30-R6000
i3300, BBP33	Fig. 2	B33-17-423	B-423	Gloss White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-18-423	B-423	Gloss White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-423	B-423	Gloss White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
i3300, BBP33	Fig. 2	B33-55-423	B-423	Gloss White	4.000 (101.6)	2.000 (50.8)	1	750	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-4000-423	B-423	Gloss White	4.000 (101.6)	150 ft. (45.7 m)	1 roll (cont.)		B30-R6000
Standard adhesive (B-430 clear):									
i3300, BBP33	Fig. 1	B33-5-430	B-430	Clear	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-17-430	B-430	Clear	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-18-430	B-430	Clear	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
Strong adhesive for textured surfaces (B-422 gloss white):									
i3300, BBP33	Fig. 1	B33-149-422	B-422	Gloss White	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-5-422	B-422	Gloss White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-147-422	B-422	Gloss White	1.500 (38.1)	0.375 (9.5)	2	2500	B30-R6000
i3300, BBP33	Fig. 2	B33-102-422	B-422	Gloss White	1.500 (38.1)	0.375 (9.5)	1	2500	B30-R6000
i3300, BBP33	Fig. 2	B33-136-422	B-422	Gloss White	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-17-422	B-422	Gloss White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-18-422	B-422	Gloss White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-422	B-422	Gloss White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
i3300, BBP33	Fig. 2	B33-76-422	B-422	Gloss White	4.000 (101.6)	3.000 (76.2)	1	500	B30-R6000

✂ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

BradyID.com/s36


Polyester Labels (continued)

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Stronger adhesive for textured surfaces (B-432 clear):									
i3300, BBP33	Fig. 1	B33-149-432	B-432	Clear	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-5-432	B-432	Clear	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-17-432	B-432	Clear	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-18-432	B-432	Clear	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-432	B-432	Clear	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-432	B-432	Clear	4.000 (101.6)	120 ft. (36.6 m)	1 roll (cont.)		B30-R6000
Ultra-aggressive adhesive for highly textured surfaces (B-483 gloss white):									
i3300, BBP33	Fig. 1	B33-149-483	B-483	Gloss White	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-5-483	B-483	Gloss White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-17-483	B-483	Gloss White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-7-483	B-483	Gloss White	2.750 (69.9)	1.250 (31.8)	1	1000	B30-R6000
i3300, BBP33	Fig. 2	B33-18-483	B-483	Gloss White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-483	B-483	Gloss White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
i3300, BBP33	Fig. 2	B33-55-483	B-483	Gloss White	4.000 (101.6)	2.000 (50.8)	1	750	B30-R6000
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-483	B-483	Gloss White	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)		B30-R6000
Ultra-aggressive adhesive for highly textured surfaces (B-489 matte white):									
i3300, BBP33	Fig. 1	B33-5-489	B-489	Matte White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R4300
i3300, BBP33	Fig. 2	B33-17-489	B-489	Matte White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-18-489	B-489	Matte White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-19-489	B-489	Matte White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R4300
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-489	B-489	Matte White	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)		B30-R4300
Ultra-aggressive adhesive and pliable for conforming to angular surfaces (B-484A gloss white):									
i3300, BBP33	Fig. 2	B33-125-484	B-484A	Gloss White	0.900 (22.9)	0.500 (12.7)	1	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-5-484	B-484A	Gloss White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-136-484	B-484A	Gloss White	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-17-484	B-484A	Gloss White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-18-484	B-484A	Gloss White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-484	B-484A	Gloss White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-484	B-484A	Gloss White	4.000 (101.6)	150 ft. (45.7 m)	1 roll (cont.)		B30-R6000
Permanent acrylic adhesive (B-488 matte white)									
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-488	B-488	Matte White	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)		B30-R4300
Self-extinguishing polyvinylfluoride (B-787 gloss white)									
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-787	B-787	Gloss White	4.000 (101.6)	60 ft. (18.3 m)	1 roll (cont.)		B30-R6000

Technical Data Sheets

Technical Data Sheets for all Brady label materials are available at:

BradyID.com/techdata

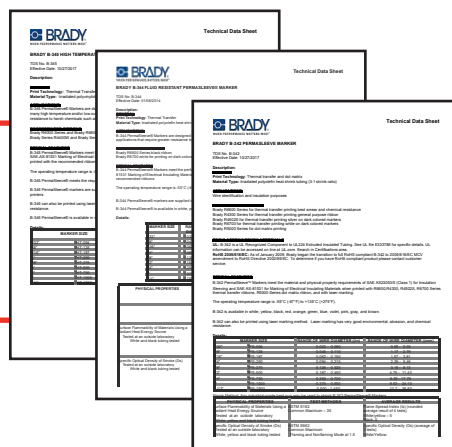

✂ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP[®]30, BBP[®]31, BBP[®]33, BBP[®]35 and BBP[®]37 printers.

B30- and B33-Series Materials

BradyID.com/s36

Metallized Polyester Labels (B-428, B-434, B-435, B-438, B-486 and B-565)

- For product labeling, asset tracking and general industrial identification
- Ideal for serial number plates and rating plates with name-plate quality and metal-looking finish

B-428: Service temp: -40° F to 293° F
B-434: Service temp: -40° F to 194° F
B-435: Service temp: -40° F to 194° F
B-438: Service temp: -40° F to 104° F
B-486: Service temp: -94° F to 248° F
B-565: Service temp: -40° F to 240° F

Agency approvals:   
Agency approvals:   
Agency approvals:   
Agency approvals:   
Agency approvals:   
Agency approvals:   




Figure 1




Figure 2




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Standard adhesive for smooth surfaces (B-428 matte):									
i3300, BBP33	Fig. 1	B33-5-428	B-428	Matte Silver	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R4300
i3300, BBP33	Fig. 2	B33-53-428	B-428	Matte Silver	2.000 (50.8)	0.500 (12.7)	1	2500	B30-R4300
i3300, BBP33	Fig. 2	B33-17-428	B-428	Matte Silver	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-18-428	B-428	Matte Silver	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-19-428	B-428	Matte Silver	3.000 (76.2)	2.000 (50.8)	1	500	B30-R4300
i3300, BBP33	Fig. 3	B33C-3000-428	B-428	Matte Silver	3.000 (76.2)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-428	B-428	Matte Silver	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)		B30-R4300
Standard adhesive for smooth surfaces (B-565 matte):									
All*	Fig. 3	B30C-1125-565-SL	B-565	Matte Silver	1.125 (28.6)	100 ft. (30.5m)	1 roll (cont.)		B30-R4300
All*	Fig. 3	B30C-2250-565-SL	B-565	Matte Silver	2.250 (57.5)	100 ft. (30.5m)	1 roll (cont.)		B30-R4300
All* ✂	Fig. 3	B30C-4000-565-SL	B-565	Matte Silver	4.000 (101.6)	100 ft. (30.5m)	1 roll (cont.)		B30-R4300
Standard adhesive for smooth surfaces (B-435 gloss):									
i3300, BBP33	Fig. 2	B33-18-435	B-435	Gloss Silver	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-435	B-435	Gloss Silver	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
i3300, BBP33	Fig. 2	B33-55-435	B-435	Gloss Silver	4.000 (101.6)	2.000 (50.8)	1	750	B30-R6000
Stronger adhesive for rougher surfaces (B-434 gloss):									
i3300, BBP33	Fig. 1	B33-5-434	B-434	Gloss Silver	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-136-434	B-434	Gloss Silver	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-17-434	B-434	Gloss Silver	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-18-434	B-434	Gloss Silver	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-434	B-434	Gloss Silver	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
i3300, BBP33	Fig. 2	B33-55-434	B-434	Gloss Silver	4.000 (101.6)	2.000 (50.8)	1	750	B30-R6000
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-434	B-434	Gloss Silver	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)		B30-R6000
Ultra-aggressive adhesive with metallic looking finish (B-480 satin):									
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 3	B30C-4000-480	B-480	Light Gray	4.000 (101.6)	115 ft. (35.1 m)	1 roll (cont.)		B30-R6000
Ultra-aggressive adhesive for highly textured, powder coated and low surface energy surfaces (B-486 matte):									
i3300, BBP33	Fig. 2	B33-59-486	B-486	Matte Silver	1.000 (25.4)	0.500 (12.7)	1	2500	B30-R4300
i3300, BBP33	Fig. 1	B33-5-486	B-486	Matte Silver	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R4300
i3300, BBP33	Fig. 2	B33-53-486	B-486	Matte Silver	2.000 (50.8)	0.500 (12.7)	1	2500	B30-R4300
i3300, BBP33	Fig. 2	B33-17-486	B-486	Matte Silver	2.000 (50.8)	1.000 (25.4)	1	1300	B30-R4300
i3300, BBP33	Fig. 2	B33-7-486	B-486	Matte Silver	2.750 (69.9)	1.250 (31.8)	1	1000	B30-R4300
i3300, BBP33	Fig. 2	B33-18-486	B-486	Matte Silver	3.000 (76.2)	1.000 (25.4)	1	1300	B30-R4300
i3300, BBP33	Fig. 2	B33-19-486	B-486	Matte Silver	3.000 (76.2)	2.000 (50.8)	1	500	B30-R4300
i3300, BBP33	Fig. 2	B33-76-486	B-486	Matte Silver	4.000 (101.6)	3.000 (76.2)	1	500	B30-R4300
i3300, BBP33	Fig. 2	B33-161-486	B-486	Matte Silver	4.000 (101.6)	4.000 (101.6)	1	250	B30-R4300
S3000, S3100, i3300, BBP35, BBP37 ✂	Fig. 2	B30C-4000-486	B-486	Matte Silver	4.000 (101.6)	115 ft. (35.1 m)	1 roll (cont.)		B30-R4300

✂ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

Tamper-Evident Asset ID Labels (B-438)

Leaves checkerboard footprint on surface and on label if removed to prevent re-use

Service temp: -40° F to 104° F

Agency approvals:   




Figure 2




Figure 3



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
All*	Fig. 2	B30-17-438	B-438	Matte Silver	2.000 (50.8)	1.000 (25.4)	1	1225	B30-R4300
All*	Fig. 2	B30-18-438	B-438	Matte Silver	3.000 (76.2)	1.000 (25.4)	1	1225	B30-R4300
All*	Fig. 2	B30-222-438	B-438	Matte Silver	3.000 (76.2)	2.000 (50.8)	1	650	B30-R4300
All*	Fig. 3	B30C-3000-438-SL	B-438	Matte Silver	3.000 (76.2)	100 ft. (30.5 m)	1 roll (cont.)		B30-R4300

Paper Labels (B-424)

- Economical choice for light duty general ID
- White finish and matte topcoat
- Excellent contrast and smear resistance for barcode printing

Service temp: -40° F to 124° F

Agency approvals: 




Figure 2



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 2	B33-53-424	B-424	White	2.000 (50.8)	0.500 (12.7)	1	2500	B30-R4300
i3300, BBP33	Fig. 2	B33-17-424	B-424	White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-7-424	B-424	White	2.750 (69.9)	1.250 (31.8)	1	1000	B30-R4300
i3300, BBP33	Fig. 2	B33-18-424	B-424	White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-19-424	B-424	White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R4300
i3300, BBP33	Fig. 2	B33-20-424	B-424	White	3.000 (76.2)	5.000 (127)	1	250	B30-R4300
i3300, BBP33	Fig. 2	B33-55-424	B-424	White	4.000 (101.6)	2.000 (50.8)	1	750	B30-R4300
i3300, BBP33	Fig. 2	B33-25-424	B-424	White	4.000 (101.6)	6.000 (152.4)	1	350	B30-R4300
S3000, S3100, i3300, BBP35, BBP37	✗ Fig. 3	B30C-4000-424	B-424	White	4.000 (101.6)	150 ft. (45.7 m)	1 roll (cont.)		B30-R4300

Polypropylene Labels (B-425)

- General labeling material for indoor use
- Outstanding chemical and solvent resistance and print performance
- Not recommended for prolonged outdoor use

Service temp: -94° F to 212° F

Agency approvals:    



Figure 1




Figure 2



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 1	B33-5-425	B-425	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R4300
i3300, BBP33	Fig. 2	B33-17-425	B-425	White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-18-425	B-425	White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 2	B33-19-425	B-425	White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R4300

✗ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:

BradyPrinter S3000, S3100, i3300, BBP[®]30, BBP[®]31, BBP[®]33, BBP[®]35 and BBP[®]37 printers.

B30- and B33-Series Materials

BradyID.com/s36

Standard Polyimide Labels (B-724 and B-727)

Top- or bottom-side component ID or board ID labels that withstand the various processes, fluxes and cleaning solvents encountered in the manufacture of printed circuit boards

B-727: Service temp: -94° F to 212° F

(short burst max temp: 80 sec at 572° F, 5 min at 500° F, 2 hrs at 338° F)

Agency approvals:  RoHS

B-724: Service temp: -94° F to 518° F

(short burst max temp: 80 sec at 626° F, 5 min at 536° F)

Agency approvals:  RoHS


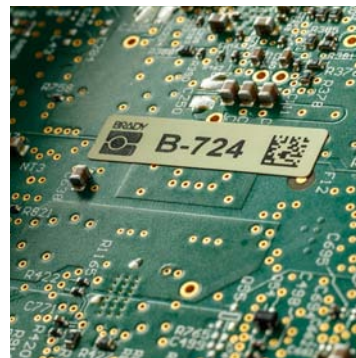


Figure 1




Figure 2




Figure 3

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Standard temperature (B-727 gloss white):									
i3300, BBP33	Fig. 1	B33-11-727	B-727	Gloss White	0.250 (6.35)	0.250 (6.4)	12	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-38-727	B-727	Gloss White	0.375 (9.5)	0.375 (9.5)	9	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-149-727	B-727	Gloss White	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-1-727	B-727	Gloss White	0.750 (19.1)	0.250 (6.4)	4	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-49-727	B-727	Gloss White	0.900 (22.9)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-2-727	B-727	Gloss White	0.900 (22.9)	0.250 (6.4)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-103-727	B-727	Gloss White	1.000 (25.4)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-58-727	B-727	Gloss White	1.000 (25.4)	0.375 (9.5)	1	4000	B30-R6000
i3300, BBP33	Fig. 2	B33-59-727	B-727	Gloss White	1.000 (25.4)	0.500 (12.7)	1	2500	B30-R6000
i3300, BBP33	Fig. 2	B33-43-727	B-727	Gloss White	1.250 (31.8)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-44-727	B-727	Gloss White	1.375 (34.9)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-45-727	B-727	Gloss White	1.500 (38.1)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-72-727	B-727	Gloss White	1.750 (44.5)	0.250 (6.4)	1	5000	B30-R6000
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-4000-727	B-727	Gloss White	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)		B30-R6000
Extremely high temperature (B-724 matte amber):									
i3300, BBP33	Fig. 1	B33-149-724	B-724	Matte Amber	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R4300
i3300, BBP33	Fig. 2	B33-46-724	B-724	Matte Amber	0.750 (19.1)	0.250 (6.4)	1	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-1-724	B-724	Matte Amber	0.750 (19.1)	0.250 (6.4)	4	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-2-724	B-724	Matte Amber	0.900 (22.9)	0.250 (6.4)	3	5000	B30-R4300
i3300, BBP33	Fig. 2	B33-43-724	B-724	Matte Amber	1.250 (31.8)	0.250 (6.4)	1	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-4-724	B-724	Matte Amber	1.500 (38.1)	0.250 (6.4)	2	5000	B30-R4300
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-4000-724	B-724	Matte Amber	4.000 (101.6)	130 ft. (39.6 m)	1 roll (cont.)		B30-R4300

✕ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

Static Dissipative Polyimide Labels (B-717, B-718 and B-719)

- Circuit board and electronic component identification with static dissipative adhesive and release liner with surface resistivity values recommended for dissipative ESD packaging
- Complies with EIA-541 packaging material standards for ESD sensitive items
- For top- or bottom-side component or board identification

Service temp: -94° F to 212° F (short burst max temp:

80 sec at 572° F, 5 min at 500° F, 2 hrs at 338° F)

Agency approvals:  RoHS




Figure 1




Figure 2




Figure 4



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Standard thickness (B-717 gloss white):									
i3300, BBP33	Fig. 2	* B33-46-717	B-717	Gloss White	0.750 (19.1)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-103-717	B-717	Gloss White	1.000 (25.4)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-43-717	B-717	Gloss White	1.250 (31.8)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-45-717	B-717	Gloss White	1.500 (38.1)	0.250 (6.4)	1	5000	B30-R6000
Low-profile label (B-718 gloss white):									
i3300, BBP33	Fig. 4	* B33-11-718	B-718	Gloss White	0.250 (6.4)	0.250 (6.4)	12	1500	B30-R6000
i3300, BBP33	Fig. 1	* B33-38-718	B-718	Gloss White	0.375 (9.5)	0.375 (9.5)	9	5000	B30-R6000
i3300, BBP33	Fig. 1	* B33-149-718	B-718	Gloss White	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R6000
i3300, BBP33	Fig. 1	* B33-1-718	B-718	Gloss White	0.750 (19.1)	0.250 (6.4)	4	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-46-718	B-718	Gloss White	0.750 (19.1)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-49-718	B-718	Gloss White	0.900 (22.9)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-43-718	B-718	Gloss White	1.250 (31.8)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-45-718	B-718	Gloss White	1.500 (38.1)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-72-718	B-718	Gloss White	1.750 (44.5)	0.250 (6.4)	1	5000	B30-R6000
Low-profile label to prevent sticking of solder balls (B-719 matte white):									
i3300, BBP33	Fig. 1	* B33-38-719	B-719	Matte White	0.375 (9.5)	0.375 (9.5)	9	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-46-719	B-719	Matte White	0.750 (19.1)	0.250 (6.4)	1	5000	B30-R6000
i3300, BBP33	Fig. 1	* B33-2-719	B-719	Matte White	0.900 (22.9)	0.250 (6.4)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	* B33-43-719	B-719	Matte White	1.250 (31.8)	0.250 (6.4)	1	5000	B30-R6000

*  **WARNING:** Cancer www.P65Warnings.ca.gov

✕ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:

BradyPrinter S3000, S3100, i3300, BBP[®]30, BBP[®]31, BBP[®]33, BBP[®]35 and BBP[®]37 printers.

B30- and B33-Series Materials

BradyID.com/s36

Panel ID Labels

(B-483, B-484A, B-499, B-593 and B-595)

- Various sizes in several durable material types
- Also ideal for marking backer board, DIN rail, relays, PLCs, switches, solenoids, drive motors and other components inside panels
- All recommended materials are flexible and have high-tack adhesives for adhesion to wide variety of surfaces and components

B-483: Service temp: -40° F to 248° F Agency approvals:
 B-484A: Service temp: -40° F to 240° F Agency approvals:
 B-499: Service temp: -40° F to 193° F Agency approvals:
 B-593: Service temp: -4° F to 212° F Agency approvals:
 B-595: Service temp: -40° F to 180° F Agency approvals:




Figure 1




Figure 2




Figure 3




Figure 18c




Figure 70

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Nylon cloth with permanent adhesive (B-499):									
i3300, BBP33	Fig. 1	B33-68-499	B-499	White	0.500 (12.7)	0.750 (19.1)	4	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-165-499	B-499	White	0.800 (20.3)	1.437 (36.5)	4	2500	B30-R6000
i3300, BBP33	Fig. 2	B33-125-499	B-499	White	0.900 (22.9)	0.500 (12.7)	1	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-126-499	B-499	White	0.900 (22.9)	0.500 (12.7)	2	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-163-499	B-499	White	1.000 (25.4)	0.375 (9.5)	1	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-152-499	B-499	White	1.000 (25.4)	0.375 (9.5)	2	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-136-499	B-499	White	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-137-499	B-499	White	2.000 (50.8)	1.000 (25.4)	1	1100	B30-R6000
i3300, BBP33	Fig. 2	B33-125-499	B-499	White	2.000 (50.8)	0.250 (6.4)	1	1500	B30-R6000
Polyester with ultra-aggressive adhesive for highly textured and low surface energy surfaces (B-483):									
i3300, BBP33	Fig. 1	B33-149-483	B-483	White	0.500 (12.7)	0.500 (12.7)	4	5000	B30-R6000
i3300, BBP33	Fig. 1	B33-5-483	B-483	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-17-483	B-483	White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-7-483	B-483	White	2.750 (69.9)	1.250 (31.8)	1	1000	B30-R6000
i3300, BBP33	Fig. 2	B33-18-483	B-483	White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-483	B-483	White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
i3300, BBP33	Fig. 2	B33-55-483	B-483	White	4.000 (101.6)	2.000 (50.8)	1	750	B30-R6000
Polyester with ultra-aggressive adhesive and pliable for conforming to angular surfaces (B-484A):									
i3300, BBP33	Fig. 2	B33-125-484	B-484A	White	0.900 (22.9)	0.500 (12.7)	1	1500	B30-R6000
i3300, BBP33	Fig. 1	B33-5-484	B-484A	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6000
i3300, BBP33	Fig. 2	B33-136-484	B-484A	White	1.500 (38.1)	0.750 (19.1)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-17-484	B-484A	White	2.000 (50.8)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-18-484	B-484A	White	3.000 (76.2)	1.000 (25.4)	1	1500	B30-R6000
i3300, BBP33	Fig. 2	B33-19-484	B-484A	White	3.000 (76.2)	2.000 (50.8)	1	500	B30-R6000
Raised profile polyester with ultra-aggressive adhesive (B-593):									
All*	Fig. 18c	B30EP-171-593-WT	B-593	White	0.490 (12.5)	1.060 (26.9)	1	500	B30-R6000
All*	Fig. 18c	B30EP-171-593-BK	B-593	Black	0.490 (12.5)	1.060 (26.9)	1	500	B30-R6000
Pre-printed vinyl with permanent adhesive and is conformable and indoor / outdoor grade (B-595):									
All*	Fig. 70	B30-241-595-ANSIDA	B-595		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
All*	Fig. 70	B30-25-595-ANSIDA	B-595		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
All*	Fig. 70	B30-241-595-ANSIWA	B-595		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
All*	Fig. 70	B30-25-595-ANSIWA	B-595		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000

*All supplies listed are compatible with the following printers unless otherwise noted: BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

Self-Laminating Wire and Cable Labels (B-427)

- Brady's most popular wire marker
- Features white printable area with clear tail that wraps around marker to protect text
- Superior resistance to abrasion, handling, solvents, water, oil and dirt
- Vinyl with permanent acrylic adhesive designed specifically for tightly curved surfaces

Service temp: -40° F to 158° F
Agency approvals:  




Figure 9a




Figure 12




Figure 14




Figure 15

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Print Area Height F Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 12	B33-80-427	B-427	White	0.500 (12.7)	0.750 (19.1)	0.375 (9.5)	4	2500	B30-R4300
i3300, BBP33	Fig. 12	B33-113-427	B-427	White	0.500 (12.7)	1.000 (25.4)	0.375 (9.5)	4	2500	B30-R4300
i3300, BBP33	Fig. 12	B33-8-427	B-427	White	0.500 (12.7)	1.437 (36.5)	0.500 (12.7)	5	5000	B30-R4300
i3300, BBP33	Fig. 12	B33-56-427	B-427	White	0.750 (19.1)	0.937 (23.8)	0.375 (9.5)	4	5000	B30-R4300
i3300, BBP33	Fig. 12	B33-73-427	B-427	White	0.750 (19.1)	1.750 (44.6)	0.500 (12.7)	4	3500	B30-R4300
i3300, BBP33	Fig. 12	B33-74-427	B-427	White	0.800 (20.3)	1.437 (36.5)	0.500 (12.7)	4	4000	B30-R4300
i3300, BBP33	Fig. 12	B33-115-427	B-427	White	1.000 (25.4)	0.750 (19.1)	0.375 (9.5)	2	2500	B30-R4300
i3300, BBP33	Fig. 12	B33-116-427	B-427	White	1.000 (25.4)	1.000 (25.4)	0.375 (9.5)	2	2500	B30-R4300
i3300, BBP33	Fig. 12	B33-9-427	B-427	White	1.000 (25.4)	1.437 (36.5)	0.500 (12.7)	3	2500	B30-R4300
i3300, BBP33	Fig. 12	B33-75-427	B-427	White	1.000 (25.4)	2.250 (57.2)	0.750 (19.1)	2	1400	B30-R4300
i3300, BBP33	Fig. 15	B33-131-427	B-427	White	1.000 (25.4)	2.625 (66.7)	1.000 (25.4)	1	1500	B30-R4300
i3300, BBP33	Fig. 12	B33-10-427	B-427	White	1.000 (25.4)	3.750 (95.3)	1.000 (25.4)	3	1200	B30-R4300
i3300, BBP33	Fig. 12	B33-81-427	B-427	White	1.000 (25.4)	6.000 (152.4)	1.500 (38.1)	2	500	B30-R4300
i3300, BBP33	Fig. 9a*	B33-135-427AW	B-427	All White*	1.500 (38.1)	0.750 (19.1)	-	1	1500	B30-R4300
i3300, BBP33	Fig. 14	B33-118-427	B-427	White	1.500 (38.1)	1.000 (25.4)	0.375 (9.5)	1	1250	B30-R4300
i3300, BBP33	Fig. 14	B33-119-427	B-427	White	1.500 (38.1)	1.500 (38.1)	0.500 (12.7)	1	1000	B30-R4300
i3300, BBP33	Fig. 14	B33-272-427	B-427	White	1.500 (38.1)	2.250 (57.2)	0.750 (19.1)	1	700	B30-R4300
i3300, BBP33	Fig. 14	B33-120-427	B-427	White	1.750 (44.5)	1.000 (25.4)	0.375 (9.5)	1	1250	B30-R4300
i3300, BBP33	Fig. 14	B33-121-427	B-427	White	1.750 (44.5)	1.500 (38.1)	0.500 (12.7)	1	1000	B30-R4300
i3300, BBP33	Fig. 14	B33-273-427	B-427	White	1.750 (44.5)	2.250 (57.2)	0.750 (19.1)	1	500	B30-R4300
i3300, BBP33	Fig. 9a*	B33-137-427AW	B-427	All White*	2.000 (50.8)	1.000 (25.4)	-	1	1500	B30-R4300
i3300, BBP33	Fig. 14	B33-27-427	B-427	White	2.000 (50.8)	3.750 (95.3)	1.000 (25.4)	1	400	B30-R4300
i3300, BBP33	Fig. 14	B33-26-427	B-427	White	2.500 (63.5)	2.250 (57.2)	0.750 (19.1)	1	500	B30-R4300
i3300, BBP33	Fig. 14	B33-82-427	B-427	White	2.000 (50.8)	6.000 (152.4)	1.500 (38.1)	1	200	B30-R4300

* Label is all white and does not have a clear over-laminate.

Zero-Halogen Cable Markers (B-7643)

Thermoplastic polyether polyurethane is a zero-halogen high-density, thermoplastic cable marker designed for dot matrix or thermal-transfer printing.

- Meets the requirements of a halogen-free material per IEC 61249-2-21 (2003-11)
- Excellent chemical, oil and water resistance

Service temp: -40° F to 193° F (-40° C to 90° C)
Agency approvals: 




Figure 61



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 61	B33-6010-7643-WT	B-7643	White	2.36 (60)	0.39 (9.91)	500	B30-R6000
i3300, BBP33	Fig. 61	B33-7525-7643-WT	B-7643	White	2.95 (75)	0.98 (24.9)	250	B30-R6000
i3300, BBP33	Fig. 61	B33-7510-7643-WT	B-7643	White	2.95 (75)	0.39 (9.91)	500	B30-R6000
i3300, BBP33	Fig. 61	B33-7515-7643-WT	B-7643	White	2.95 (75)	0.59 (14.9)	500	B30-R6000
i3300, BBP33	Fig. 61	B33-6010-7643-YL	B-7643	Yellow	2.36 (60)	0.39 (9.91)	500	B30-R6000
i3300, BBP33	Fig. 61	B33-7525-7643-YL	B-7643	Yellow	2.95 (75)	0.98 (24.9)	250	B30-R6000
i3300, BBP33	Fig. 61	B33-7510-7643-YL	B-7643	Yellow	2.95 (75)	0.39 (9.91)	500	B30-R6000
i3300, BBP33	Fig. 61	B33-7515-7643-YL	B-7643	Yellow	2.95 (75)	0.59 (14.9)	500	B30-R6000

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.

B30- and B33-Series Materials

BradyID.com/s36

High-Temp Adhesive Topcoated Polyvinylfluoride Wire and Cable Labels (B-437)

- Topcoated polyvinylfluoride label for wire and cable marking where high temperature and self-extinguishing features are required
- Heavy-duty performance with excellent resistance to water, oil and fluids
- Meets MIL-M-87958 Standard

Service temp: -94° F to 275° F

Agency approvals:

Also available in self-laminating format.
Contact Brady to order custom
B-642 material and B30-R4300 ribbon.





Figure 1




Figure 3




Figure 4

Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 4	B33-11-437	B-437	White	0.250 (6.4)	0.250 (6.4)	12	15000	B30-R4300
i3300, BBP33	Fig. 1	B33-1-437	B-437	White	0.750 (19.1)	0.250 (6.4)	4	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-2-437	B-437	White	0.900 (22.9)	0.250 (6.4)	3	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-5-437	B-437	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-29-437	B-437	White	1.250 (31.8)	0.375 (9.5)	2	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-5-437YL	B-437	Yellow	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R4300
i3300, BBP33	Fig. 1	B33-29-437YL	B-437	Yellow	1.250 (31.8)	0.375 (9.5)	2	5000	B30-R4300
Continuous Rolls:									
i3300, BBP33	Fig. 3	B33C-1000-437	B-437	White	1.000 (25.4)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-1500-437	B-437	White	1.500 (38.1)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-2000-437	B-437	White	2.000 (50.8)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-3000-437	B-437	White	3.000 (76.2)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300
S3000, S3100, i3300, BBP35, BBP37	Fig. 3	B30C-4000-437	B-437	White	4.000 (101.6)	150 ft. (45.7 m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-1000-437YL	B-437	Yellow	1.000 (25.4)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-1500-437YL	B-437	Yellow	1.500 (38.1)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-2000-437YL	B-437	Yellow	2.000 (50.8)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300
i3300, BBP33	Fig. 3	B33C-3000-437YL	B-437	Yellow	3.000 (76.2)	85 ft. (25.9m)	1 roll (cont.)		B30-R4300

Vinyl Cloth Adhesive Wire and Cable Labels (B-498)

- A vinyl cloth label for marking wires, cables and inside-panel components
- Repositionable — a highly unique adhesive and cloth construction gives excellent holding power and still allows for clean removal and reapplication
- Ideal choice for marking both ends of a wire that you may need to cut shorter before final termination

Service temp: -40° F to 175° F

Agency approvals:




Figure 1



Fits Printers	Figure	Catalog #	B#	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
i3300, BBP33	Fig. 1	B33-90-498	B-498	White	0.250 (6.4)	1.437 (36.5)	6	2500	B30-R6200
i3300, BBP33	Fig. 1	B33-68-498	B-498	White	0.500 (12.7)	0.750 (19.1)	4	5000	B30-R6200
i3300, BBP33	Fig. 1	B33-87-498	B-498	White	0.500 (12.7)	1.437 (36.5)	6	2500	B30-R6200
i3300, BBP33	Fig. 1	B33-1-498	B-498	White	0.750 (19.1)	0.250 (6.4)	4	5000	B30-R6200
i3300, BBP33	Fig. 1	B33-91-498	B-498	White	0.750 (19.1)	0.937 (23.8)	4	2500	B30-R6200
i3300, BBP33	Fig. 1	B33-95-498	B-498	White	0.800 (20.3)	1.437 (36.5)	3	2300	B30-R6200
i3300, BBP33	Fig. 1	B33-5-498	B-498	White	1.000 (25.4)	0.500 (12.7)	3	5000	B30-R6200
i3300, BBP33	Fig. 1	B33-88-498	B-498	White	1.000 (25.4)	0.750 (19.1)	2	2500	B30-R6200
i3300, BBP33	Fig. 1	B33-89-498	B-498	White	1.000 (25.4)	1.437 (36.5)	3	2300	B30-R6200

✕ Compatible with BBP37 XY cutter.

*All supplies listed are compatible with the following printers unless otherwise noted:
BradyPrinter S3000, S3100, i3300, BBP®30, BBP®31, BBP®33, BBP®35 and BBP®37 printers.