

Project:

Type:

Prepared By:

Date:



UPC: 019813751573

Features and Benefits

Replaces 18W/26W/32W G24d & G24q CFL Lamps

Ballast Bypass. Integral Driver enables lamp to be wired directly to line voltage without need for an external driver or ballast

Compatible with G24d / GX24d & G24q / GX24q installations

50,000 hour Lifespan

Environmentally friendly, no mercury used

UL Classified

Rated for use in enclosed and open fixtures in dry or damp locations

Non-Dimmable

5 Year No Compromise Warranty

Technical Specifications

Performance

Product Type:

Compact

Input Wattage:

9W

Wattage Equivalency:

26W Fluorescent

Lumens:

1,000lm

Efficacy:

111lm/W

L70 Lifespan:

50,000 Hours

Construction

Bulb Shape:

PLC

Finish:

Frosted

For Use Outdoors in Open Fixtures:

No

LED Characteristics

Color Temperature:

4000K Cool White

Color Accuracy (CRI):

82 CRI

Installation

Base Type:

G24d

Installation Type:

Type B, Ballast Bypass

Installation Orientation:

Vertical

Electrical

THD:

<20%

Power Factor:

0.9

Operating Temperature:

-20°C to 45°C (-4°F to 113°F)

Dimmable:

No

Input Voltage:

120-277V AC

Operating Frequency:

50/60Hz

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Compliance

UL Recognized:

Yes

Technical Specifications (continued)**UL Classified:**

Yes

California Energy Commission (CEC) Status:

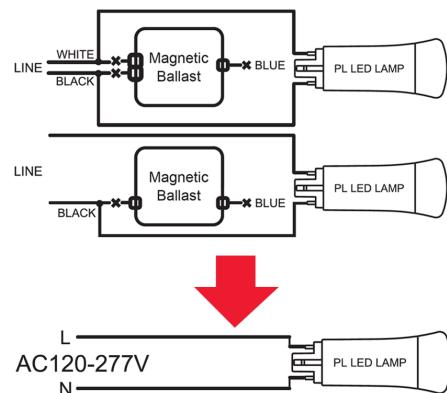
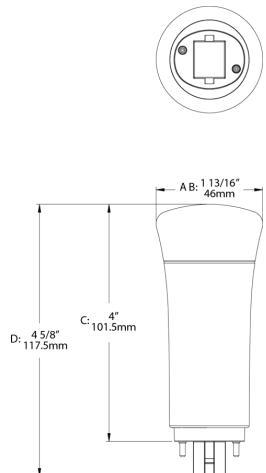
Lawful for Sales in California

Application:

Suitable for damp locations and totally enclosed fixtures.

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	8.1	6.1	5
PALLET	3456	47.2	39.4	47.6

Wiring Diagram**Dimension****Light Distribution**