

Product data sheet

Specifications

SQUARE D



Load center, Homeline, 1 phase, 30 spaces, 60 circuits, 200A convertible main breaker, PoN, NEMA3R

HOM3060M200PRB

Product availability: Stock - Normally stocked in distribution facility

Main

Product Type	Load Center
Marketing Trade Name	Homeline
Load Center Type	PoN Convertible Mains (breaker)
Rated Current	200 A
Number of Spaces	30
Maximum Number of Single Pole Circuits	60
Enclosure Rating	NEMA 3R weatherproof enclosure
Cover Type	Surface cover
Electrical Connection	Lugs
Provided Equipment	Circuit-breaker 1) 2P 200 A 120/240 V CA main supply ready assembled

Complementary

Max Short Circuit Current Rating	22 kA
Maximum Number of Tandem Breakers	30
Number of Phases	1 phase 3 wires
Voltage Rating	120/240 V AC
Wire Size	AWG 4...250 kcmil aluminium/copper
Ground Bar	Grounding bar (ordered separately)
Busbar Material	Tin plated aluminium: busbar
Enclosure Material	Welded galvannealed steel
Surface Finish	Baked enamel Gray
Box Number	7R
Bus Rated Current	225.0 A
Height	33.8 in (858 mm)
Width	14.8 in (375 mm)
Depth	4.5 in (115 mm)

Environment

Ambient Air Temperature for Operation	23 °F (-5 °C) 104 °F (40 °C)
Product Certifications	UL listed file E-6294

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Ordering and shipping details

Category	US1DE3C00145
Discount Schedule	DE3C
GTIN	785901978077
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	5.10 in (12.954 cm)
Package 1 Width	15.50 in (39.370 cm)
Package 1 Length	35.70 in (90.678 cm)
Package weight(Lbs)	40.999 lb(US) (18.597 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	24
Package 2 Height	44.50 in (113.030 cm)
Package 2 Width	40.00 in (101.600 cm)
Package 2 Length	48.00 in (121.920 cm)
Package 2 Weight	954.999 lb(US) (433.180 kg)



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) **96**

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard **No**

Packaging without single use plastic **No**

EU RoHS Directive **Under investigation**

REACH Regulation [REACH Declaration](#)

California proposition 65 **WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](#)**

Use Again


Repack and remanufacture

Circularity Profile **No need of specific recycling operations**

Take-back **No**

Technical Illustration

Dimensions

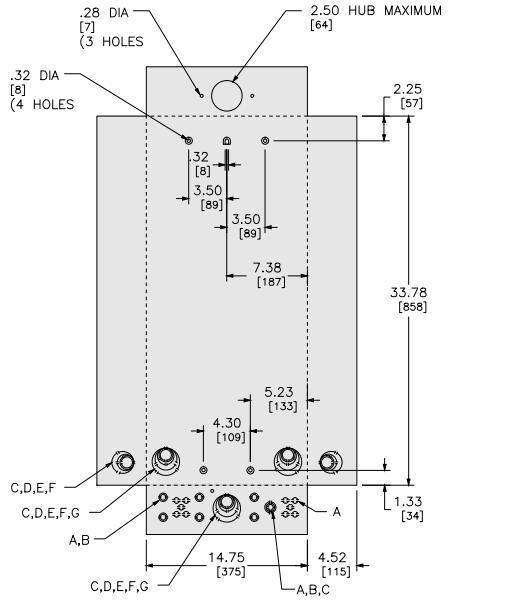


SYMBOL	KNOCKOUTS						
	A	B	C	D	E	F	
IN	.50	.75	1.00	1.25	1.50	2.00	2.50
MM	13	19	25	32	38	51	64

Dimensions are approximate. Refer to technical documentation for additional detail.

Technical Illustration

Wiring diagram

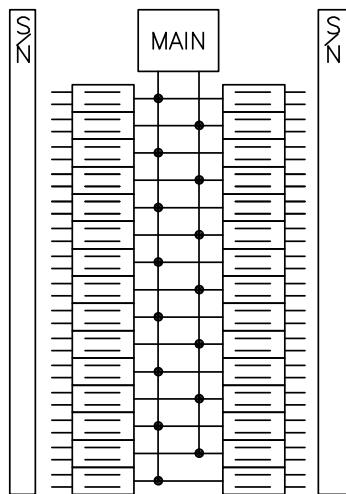

HOM3060M150PRB
HOM3060M200PRB