



# KT-FLED60-R1A-UNV-8CSB-VDIM

## COMPACT 60W GENERAL-PURPOSE LED FLOODLIGHT

### DESCRIPTION

Compact 60W General-Purpose LED Floodlight | 120–277V  
Input | 3000–5000K | Bronze Housing | Multiple Mounting Options

### APPLICATION

Building or ground mount application for outdoor illumination  
illumination (landscapes, display signage, loading  
docks, building façades, pathways, parking areas,  
and other general site lighting requirements)



5 YEAR  
WARRANTY

### PRODUCT FEATURES

- Keystone Color Select technology (3000/4000/5000K)
- Uniform, wide flood design (NEMA 7H x 7V distribution pattern)
- Heavy-duty, die cast aluminum housing featuring built-in glare visor and tempered glass lens
- Powered by Keystone 0–10V dimming LED driver
- Built-in dusk-to-dawn photocell behind translucent 3/4" threaded plug with anti-yellowing agent
- Heavy-duty 1/2" knuckle mount with 90° adjustment and yoke mount options included
- Ambient operating temperature: -30°C/-22°F to 45°C/113°F
- UL listed for wet locations, IP65
- 0–10V dimming, 10% min
- Power Factor: >0.95
- THD: <20%
- LED chip lifetime: L70 >100,000 hrs @ 25°C/77°F ambient fixture temp
- Meets FCC Part 15, Part B, Class A standards for conducted and radiated emissions
- 18" input cable, pre-stripped
- Fixture impact rating IK07

### PERFORMANCE SPECIFICATIONS

Catalog Number	Wattage	Selectable CCT*	Lumens	Efficacy	Input Voltage	Housing Color	Optics Type	DLC	CRI	Metal Halide Equivalent
KT-FLED60-R1A-UNV-8CSB-VDIM	60W	3000K	7320 lm	122 lm/W	120–277V	Bronze	7H x 7V	Yes	>80	250W MH
		4000K	8580 lm	143 lm/W						
		5000K	8040 lm	134 lm/W						

\* Color Uniformity: CCT (Correlated Color Temperature) range as per guidelines outlined in ANSI C78.377-2017




# KT-FLED60-R1A-UNV-8CSB-VDIM


## COMPACT 60W GENERAL-PURPOSE LED FLOODLIGHT

### PHOTOMETRIC SPECIFICATIONS

#### ISOCANDELA PLOT

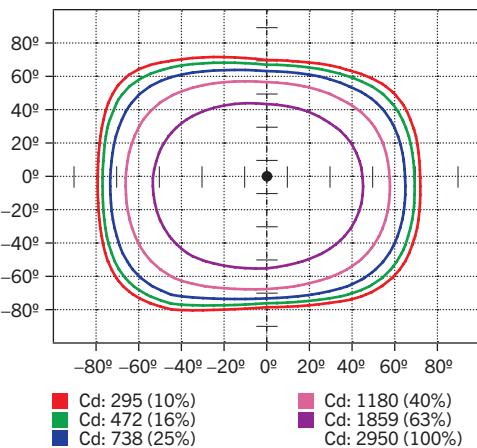

#### LUMINOUS INTENSITY DISTRIBUTION

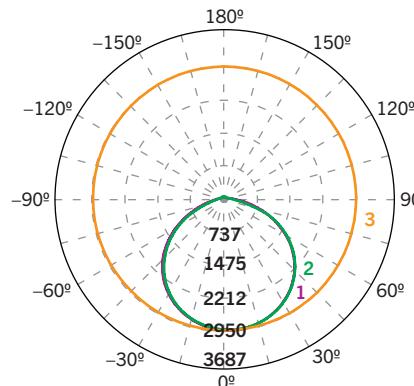

#### FLUX DISTRIBUTION

Zone	Lumens	% Luminaire
Forward Light	4,171 lm	50.8%
0°–30°	1,159 lm	14.1%
30°–60°	2,300 lm	28.0%
60°–80°	699 lm	8.5%
80°–90°	14 lm	0.2%
Back Light	3,981 lm	48.4%
0°–30°	1,146 lm	13.9%
30°–60°	2,200 lm	26.8%
60°–80°	624 lm	7.6%
80°–90°	11 lm	0.1%
Up Light	65 lm	0.8%
90°–100°	3 lm	0.0%
100°–180°	61 lm	0.7%

#### BUG\* Rating



Asymmetrical Luminare Types	
Type I, II, III, IV	B3 U2 G2
Quadrilateral Symmetrical Luminare Types	
Type V, Area Light	B3 U2 G1

\* Backlight, Uplight, Glare

#### LIGHT DISTRIBUTION PATTERNS (Isometric view from above)

Building exterior mounted at  
15', 30° below horizontal

Ground mounted at 6" above ground,  
10° above horizontal, shining towards building exterior  
wall at 20' away

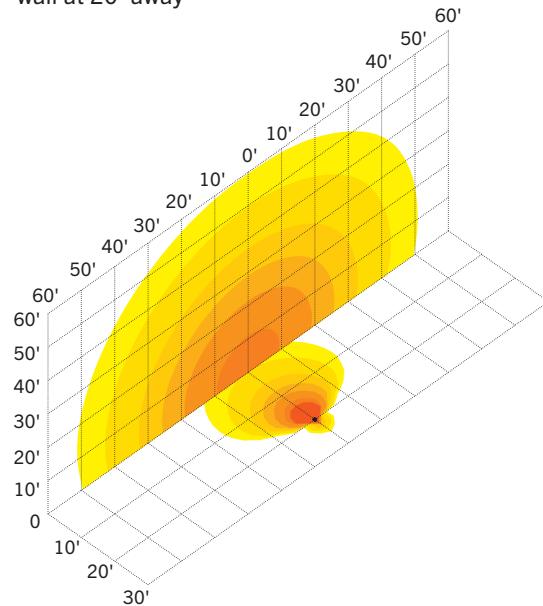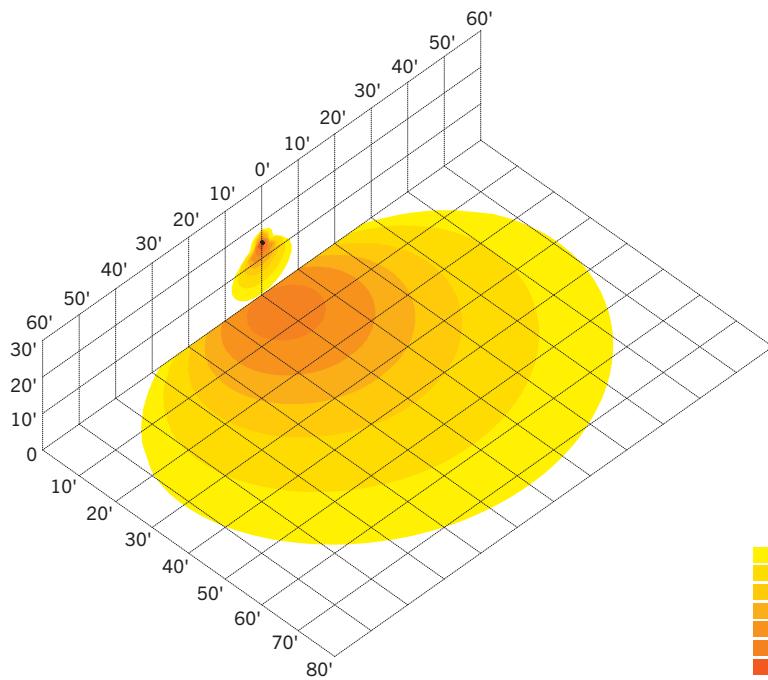




# KT-FLED60-R1A-UNV-8CSB-VDIM

## COMPACT 60W GENERAL-PURPOSE LED FLOODLIGHT


### PHYSICAL SPECIFICATIONS

#### KNUCKLE MOUNT

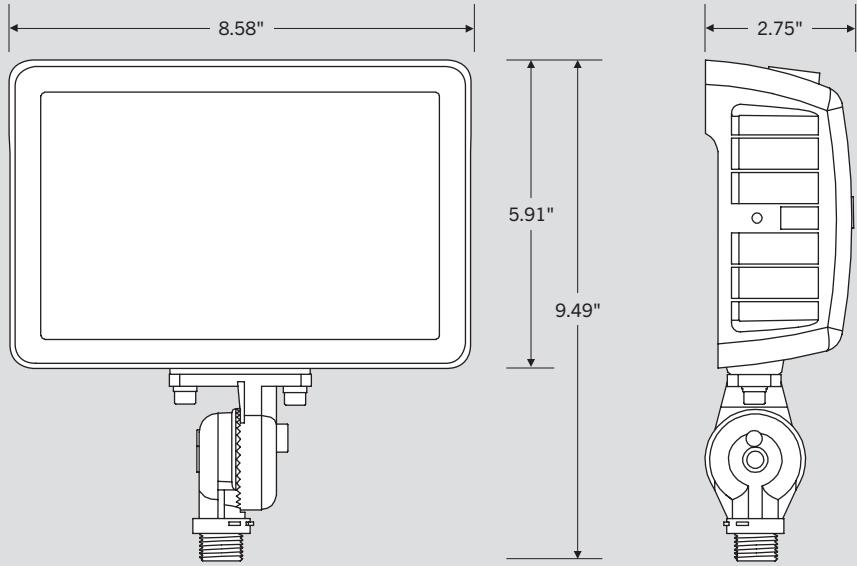

	EPA
Mounted Vertical	0.42 sq/ft
Mounted Horizontal	0.20 sq/ft
Mounted 45°	0.44 sq/ft

#### YOKE MOUNT

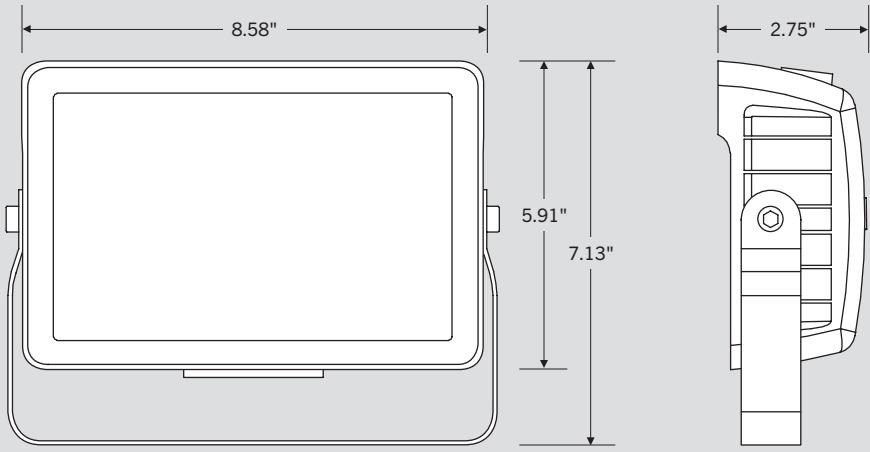




# KT-FLED60-R1A-UNV-8CSB-VDIM

## COMPACT 60W GENERAL-PURPOSE LED FLOODLIGHT

### GENERAL SETUP INSTRUCTIONS

#### GENERAL WIRING DIAGRAM

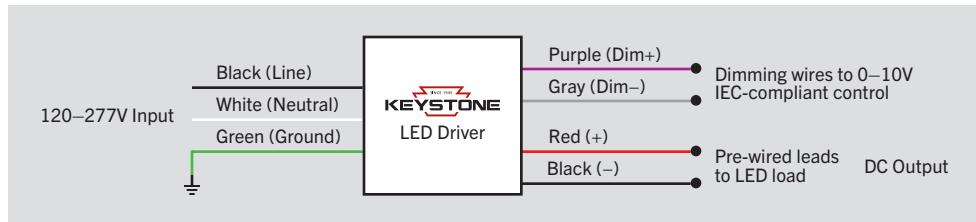

#### PHOTOCELL ENABLE/DISABLE


This fixture is equipped with a dusk-to-dawn photocell behind the translucent knock-out (KO) cover. Adjust the dip switch to enable (ON) or disable (OFF) the photocell function (see illustrations to the right). Fixture comes preset with photocell enabled unless otherwise noted.

#### COLOR SELECT (CCT) ADJUSTMENT

This fixture is equipped with Color Select technology. There is an adjustable dip switch behind the translucent knock-out (KO) cover to change CCT between 5000K, 4000K, and 3000K (see illustrations to the right). Fixture comes preset at 5000K unless otherwise noted.

**Caution:** Before installing, make certain that AC power to the fixture is off.

**Caution:** The electrical rating of this product is 120-277V. Installer must confirm that there is 120-277V at the fixture before installation.

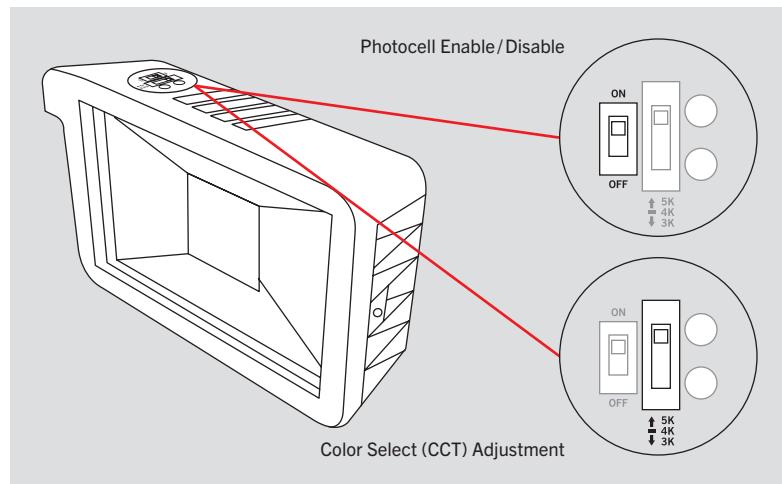

### ACCESSORIES (SOLD SEPARATELY)

#### CORD SETS

Factory-Installable OR Field-Installable (field-installable options must be purchased separately)

SUFFIX*	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
/515P6	KT-CS-515P-6-18/3	Cord set; 125V NEMA 5-15P; straight blade plug; 6' SJTOW cable; 18/3 wire	843654140124	UKH-26

\* For factory installation of accessory, add suffix to fixture part number (see ordering examples and instructions on last page of spec sheet).

Note: For cord sets not listed here, please contact your Keystone sales rep.



## KT-FLED60-R1A-UNV-8CSB-VDIM


### COMPACT 60W GENERAL-PURPOSE LED FLOODLIGHT

#### ACCESSORIES (continued)

##### MOUNTS AND BRACKETS

**Field-Installable** (field-installable options must be purchased separately)

✓	SUFFIX*	CATALOG NUMBER	DESCRIPTION	UPC	EASY CODE
	N/A	KT-FLED-SM-1-KIT	Surface Mount / Wall Mount Kit for Series 1 Flood Lights. Fits 15W thru 60W fixtures. Includes Mounting Hardware. Standard Bronze Housing	843654129167	HZJ-35
	N/A	KT-FLED-RC-4	Round Cover Plate for mounting Floodlights on 4" Round boxes. Includes Mounting Hardware. Standard Bronze Color	843654129181	IOI-49
	N/A	KT-FLED-WG-3-KIT	Wire Guard for 60W Rectangular Series 1 LED Floodlight	843654138848	BME-93
	N/A	KT-FLED-SF-1-KIT	Slip Fitter Mount Adaptor for 15W, 35W, and 60W Rectangular Series 1 LED Floodlight. Bronze	843654153308	TZP-68

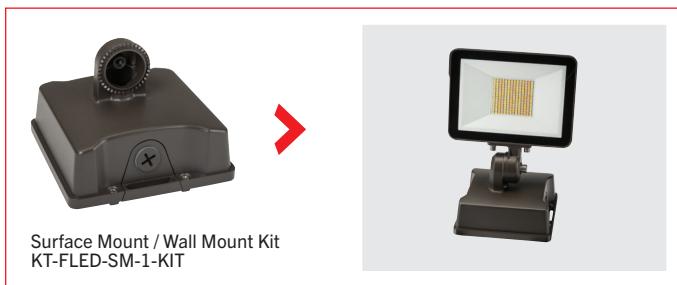



## KT-FLED60-R1A-UNV-8CSB-VDIM

COMPACT 60W GENERAL-PURPOSE LED FLOODLIGHT

### ORDERING INFORMATION

CATALOG NUMBER	PACK QTY.	UPC	EASY CODE
KT-FLED60-R1A-UNV-8CSB-VDIM	1	843654128986	BVB-78

### CATALOG NUMBER BREAKDOWN

# KT-FLED60-R1A-UNV-8CSB-VDIM


1 2 3 4 5 6 7 8 9 10 11

1 Keystone Technologies	2 Fixture Type	5 Shape	6 Series Designation
2 Fixture Type	F Flood	R Rectangular	1 General Purpose Floodlight
3 LED Lamp			
4 Max Wattage			
5 Shape	7 Distribution	8 Mounting	9 CRI
6 Series Designation	A NEMA 7H x 7V	UNV Universal	8 >80
7 Distribution			
8 Mounting			
9 CRI	10 Color	11 Color Select Designation	
10 Color	CS Color Select	B 3000/4000/5000K	
11 Color Select Designation			
12 Dimming	12 Dimming	13 Housing Color	
13 Housing Color	VDIM 0-10V	W Bronze	

### ORDERING EXAMPLES

Fixture with single factory-installed accessory

KT-FLED60-RIA-UNV-8CSB-VDIM /515P6



### KEYSTONE FIXTURE

### CATALOG NUMBER

KT-HBLED60-1.5F-840-VDIM-P/G2

### CORD SETS

SUFFIX	CATALOG NUMBER
/515P6	KT-CS-515P-6-18/3