


Lutron Tamper Resistant, Self-Testing GFCI Receptacles

Features

- Continuous self-test functionality – disconnects power to receptacle if critical components are damaged and GFCI protection is lost – providing “continuous self-testing” that initiates within 2.5 seconds and is a continuous cycle every 30 seconds or less.
- Three provisions for providing protection:
 - Continuous electronic sensing, testing and evaluation utilizing diagnostic software located on the printed circuit board.
 - Traditional testing mode by manually operating the “test and reset” buttons utilizing a supervisory circuit as specified in UL® 943 section 5.15.
 - Auto-sensing mode for immediate interruption for a ground fault condition for Class A protection (4 – 6 mA).
- Manual Test – this design incorporates a full system test function. The GFCI, when manually tested, induces a simulated ground fault leakage current to the printed circuit board. This in turn causes the mechanical system to react based on the action of the solenoid. The entire mechanical and electronic GFCI system is reviewed for functionality.
- Reverse wire safety feature – if wired incorrectly there will be no power to the face or to downstream receptacles for added safety.
- Clear visual indication of GFCI status — LED indicating lights:
 - Green LED (power to the device)
 - Red LED (trip condition/ground fault condition)
 - Flashing Red LED (end of life)
- Permanently installed internal tamper-resistant shutter mechanism capable of resisting insertion of foreign elements into the device.
- Internal back wiring clamp and guide pocket — quick and dependable termination.
- Receptacle face compatible with NEMA designer and NovaT☆ designer-opening wallplates.
- Compliant with NEC® 406.12 and NEC® 517-18(c).

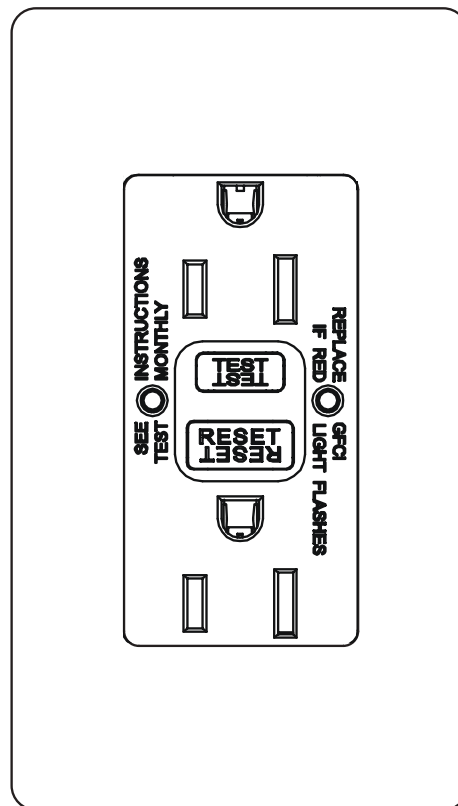

Models Available:

15 A

CAR-15-GFST-XX	15 A 125 V~ 60 Hz
SCR-15-GFST-XX	15 A 125 V~ 60 Hz
NTR-15-GFST-XX	15 A 125 V~ 60 Hz

20 A

SCR-20-GFST-XX	20 A 125 V~ 60 Hz
NTR-20-GFST-XX	20 A 125 V~ 60 Hz

(XX in model number represents color/finish code)

Job Name:	Model Numbers:
Job Number:	

Specifications

Regulatory Approvals

- Meets UL® 943 Class A GFCIs and UL® 498 for receptacles
- Complies to NEC®, CEC & OSHA, UL® File E-41978, CSA File LR-24886
- UL® Listed
- CSA Certified
- NOM Certified
- UL® 943 Dust Test: Meets performance requirement section 6.20 UL® 943 GFCI

Power

- 15 A & 20 A, 125 V~ (102 V~ – 132 V~) 60 Hz
- Exceeds immunity level of 0.5 V over a frequency range of 150 kHz to 230 MHz

Electrical

- Trip Level: 4 – 6 mA
- Trip Time: .025 seconds (nominal)
- Frequency: 60 Hz
- Max Interruption: 10,000 A

Environmental

- Operating Temperature: -35 °C to 66 °C (-30 °F to 150 °F)
- Maximum Humidity: 95%

Emissions


- Compliant for radiated emissions 30 – 1000 MHz
- Compliant for conducted emissions 150 kHz – 30 MHz

Job Name:	Model Numbers:
Job Number:	


Dimensions

Front View


NTR- models (with NovaT☆ wallplate)

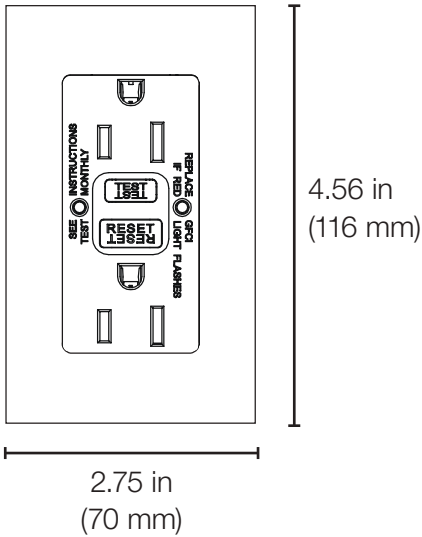


CAR- and SCR- models (with Claro wallplate)

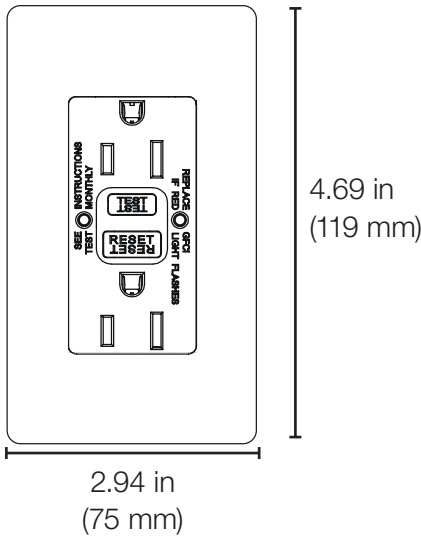


Bulk unit

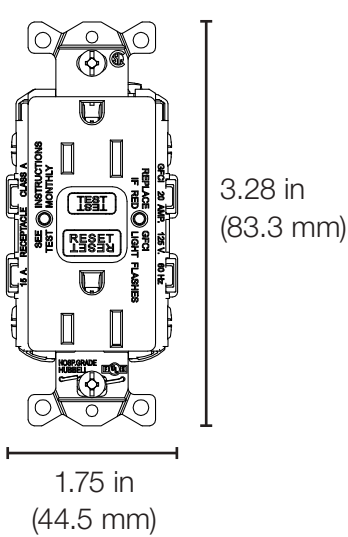

Side View
all models

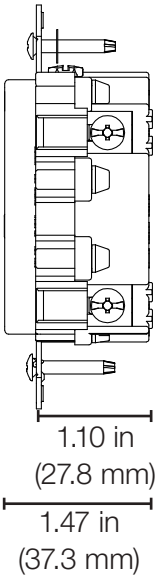


Rear View
all models


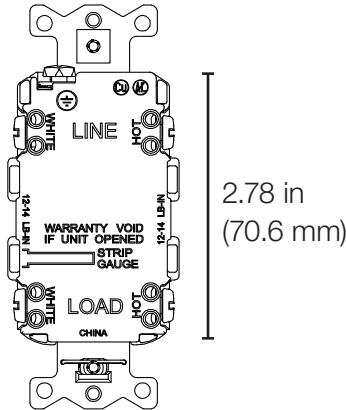


Wiring Diagrams (choose one or the other)


A: One cable entering the box

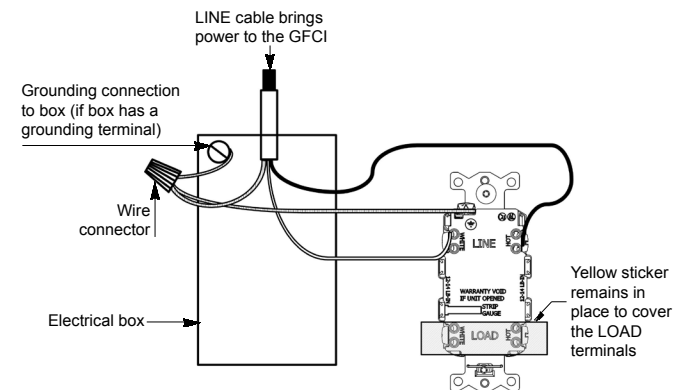

About wire connections




Back Wire





OR


B: Two cables entering the box

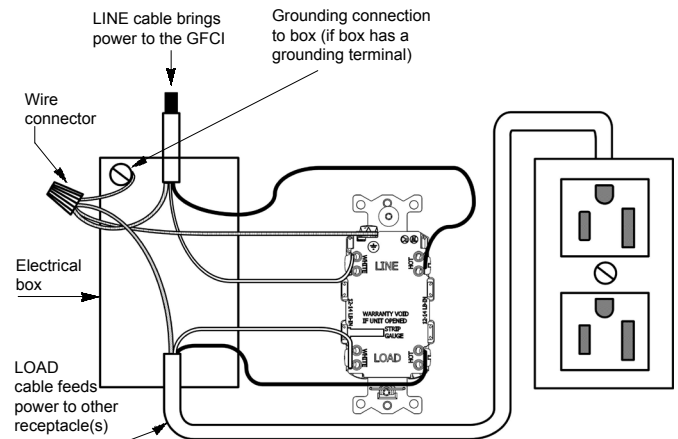


About wire connections



Back Wire



Mounting

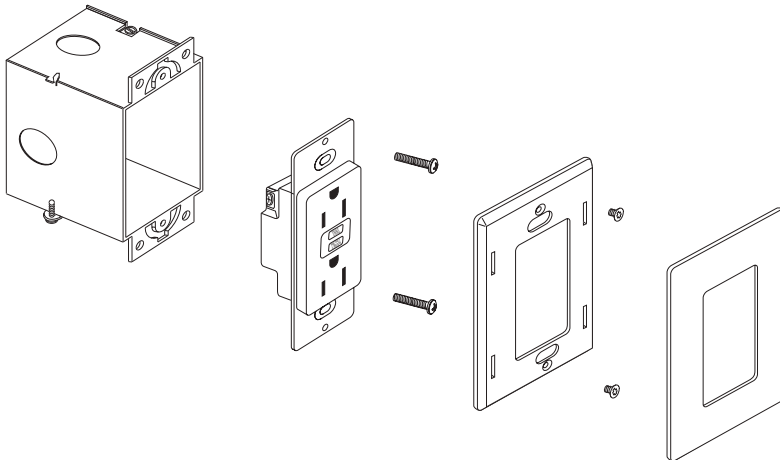

Job Name:

Model Numbers:

Job Number:

Colors and Finishes

Gloss Finishes



White
WH



Ivory
IV



Almond
AL



Light Almond
LA



Gray
GR




Brown
BR




Black
BL

Satin Finishes



Brilliant White
BW



Glacier White
GL



Snow
SW



Architectural
White
RW



Lunar Gray
LG



Mist
MI



Pebble
PB



Cobblestone
CS



Slate
SL



Midnight
MN



Biscuit
BI



Sand
SD



Taupe
TP



Pumice
PM



Clay
CY



Sage
SA



Espresso
EP



Truffle
TF



Deep Sea
DE



Signal Red
SR

- Due to printing limitations, colors and finishes shown cannot be guaranteed to perfectly match actual product colors.
- Color chip keychains are available for more precise color matching:
Gloss Finishes: DG-CK-1
Satin Finishes: SF-CK-1
For coordinating wallplates and accessories, visit lutron.com/claro








Job Name:

Model Numbers:

Job Number:

Colors and Finishes *(continued)*

Satin Colors (while supplies last)

			
Hot HT	Merlot MR	Plum PL	Palladium PD
			
Eggshell ES	Sienna SI	Terracotta TC	Greenbriar GB
			
Bluestone BG	Mocha Stone MS	Goldstone GS	Desert Stone DS
			
Stone ST	Limestone LS		

- Due to printing limitations, colors and finishes shown cannot be guaranteed to perfectly match actual product colors.
- Color chip keychains are available for more precise color matching:
Satin Colors: SC-CK-1 (while supplies last)

The Lutron logo, Lutron, Claro, Satin Colors and NovaT[®] are trademarks or registered trademarks of Lutron Electronics Co., Inc. in the US and/or other countries. All other product names, logos, and brands are property of their respective owners.

 SPECIFICATION SUBMITTAL

Page

Job Name:	Model Numbers:
Job Number:	