
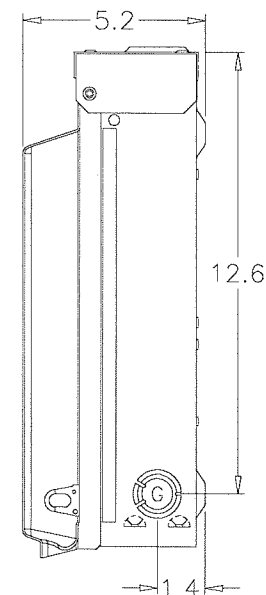
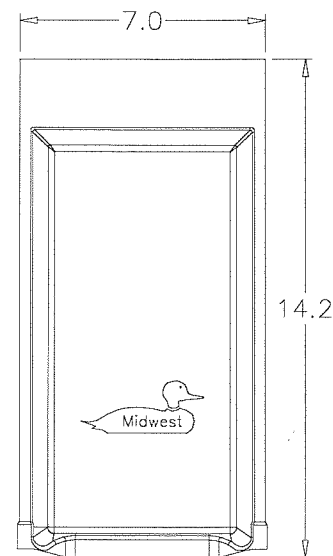
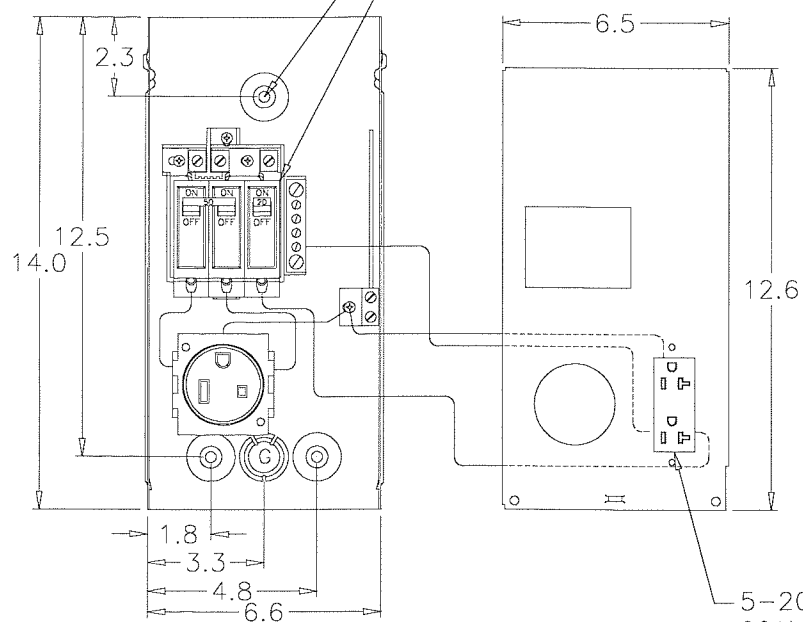


KNOCKOUT TABLE:

S=	1/2", 3/4", 1", 1-1/4", 1-1/2"
KO	1/2", 3/4", 1" KO


5/16" MOUNTING HOLE (3X)
70AMP. 3 CIRCUIT LOAD CENTER
50AMP. BREAKER 2-POLE
20AMP. BREAKER 1-POLE

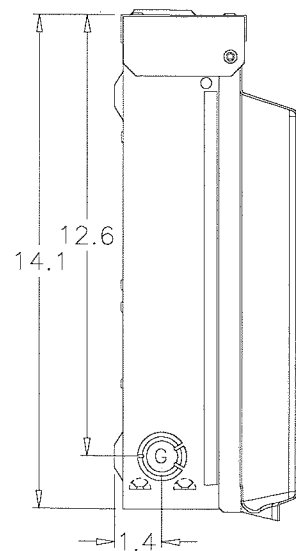


5-20R2
20AMP, DUPLEX

WIRE RANGE TABLE:

CONNECTOR	COPPER		ALUMINUM	
	SOLID	STRAND	SOLID	STRAND
LINE	14-8	14-2	12-8	12-2
LOAD	14-10	14-10	-----	-----
NEUTRAL	14-8	14-2	12-8	12-2
NEUTRAL	14-8	14-4	12-8	12-4
EQUIP. GRND.	12-8	12-2	12-8	12-2

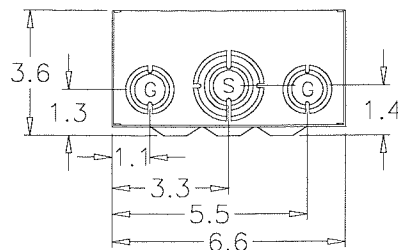

MIDWEST ELECTRIC
PRODUCTS, INC.
Mankato, MN



Dr. By: JDE

Ck. By:

CR: R0814112

* = Critical To Quality

Unless Otherwise
Specified

Tolerances On:
3 Pl. Decimals ± .010
2 Pl. Decimals ± .030
Fractions ± 1/32
Angles ± 1/2°
Holes ± .003

Dimensions Are In Inches

TITLE:

U511C
OUTLINE DRAWING

DWG NO:

265A6213

AutoCad
Generated

SCALE

1 : 1

SIZE

A

SHEET 1 OF 1

SH26

Rev.1 CR R0814112 JE 2-20-08
Rev.2 CR R11137B6 CLS 2-13-12

X