

# Product data sheet

Specifications

**SQUARE D**



**Safety switch, heavy duty, fused, viewing window, NEMA 4X, 240V, 60A, 2 pole, ground lugs**

VH222DSGL

**Product availability : Stock - Normally stocked in distribution facility**

## Main

<b>Product</b>	Single Throw Safety Switch
<b>Duty Rating</b>	Heavy duty
<b>Device Application</b>	Heavy application
<b>Disconnect Type</b>	Fusible disconnect
<b>Factory Installed Neutral</b>	Field installed kit available
<b>Number of Poles</b>	2
<b>Current Rating</b>	60 A
<b>Voltage Rating</b>	250 V DC 240 V AC
<b>Enclosure Rating</b>	NEMA 4X stainless steel 304
<b>Motor power hp</b>	3 hp 7.5 hp 10 hp 15 hp

## Complementary

<b>Short-circuit current</b>	10 kA for H, K, J or R without fuse rejection clips 200 kA for R with fuse rejection clips 200 kA for J
<b>Fuse type</b>	H or K R or J
<b>Mounting Type</b>	Surface
<b>Electrical Connection</b>	Lugs
<b>Wiring configuration</b>	2-wire
<b>Wire Size</b>	AWG 14...AWG 3 copper AWG 12...AWG 3 aluminium
<b>Tightening torque</b>	50 lbf.in (5.65 N.m) (AWG 3) 45 lbf.in (5.08 N.m) (AWG 6...AWG 4) 40 lbf.in (4.52 N.m) 0.01 in <sup>2</sup> (8.367 mm <sup>2</sup> ) (AWG 8) 50 lbf.in (5.65 N.m) 0.00...0.01 in <sup>2</sup> (2.06...5.261 mm <sup>2</sup> ) (AWG 14...AWG 10)
<b>Depth</b>	5.384 in (136.75 mm)
<b>Width</b>	7.22 in (183.39 mm)
<b>Height</b>	14.93 in (379.22 mm)
<b>Net Weight</b>	13.23 lb(US) (6 kg)
<b>Grounding Kit</b>	Factory installation

---

<b>Service Entrance</b>	Suitable service entrance for USA Suitable service entrance for Mexico
-------------------------	---

## Environment

---

<b>Certifications</b>	UL listed file E2875
-----------------------	----------------------

## Ordering and shipping details

---

<b>Category</b>	00010-H&HU SW,2&3P,N4,SS,30-200A
<b>Discount Schedule</b>	DE1
<b>GTIN</b>	3606485893150
<b>Returnability</b>	Yes
<b>Country of origin</b>	US

## Packing Units


---

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	5.50 in (13.97 cm)
<b>Package 1 Width</b>	8.87 in (22.542 cm)
<b>Package 1 Length</b>	16.62 in (42.227 cm)
<b>Package 1 Weight</b>	13.23 lb(US) (6 kg)

## Offer Sustainability

---

<b>California proposition 65</b>	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
<b>EU RoHS Directive</b>	Under investigation

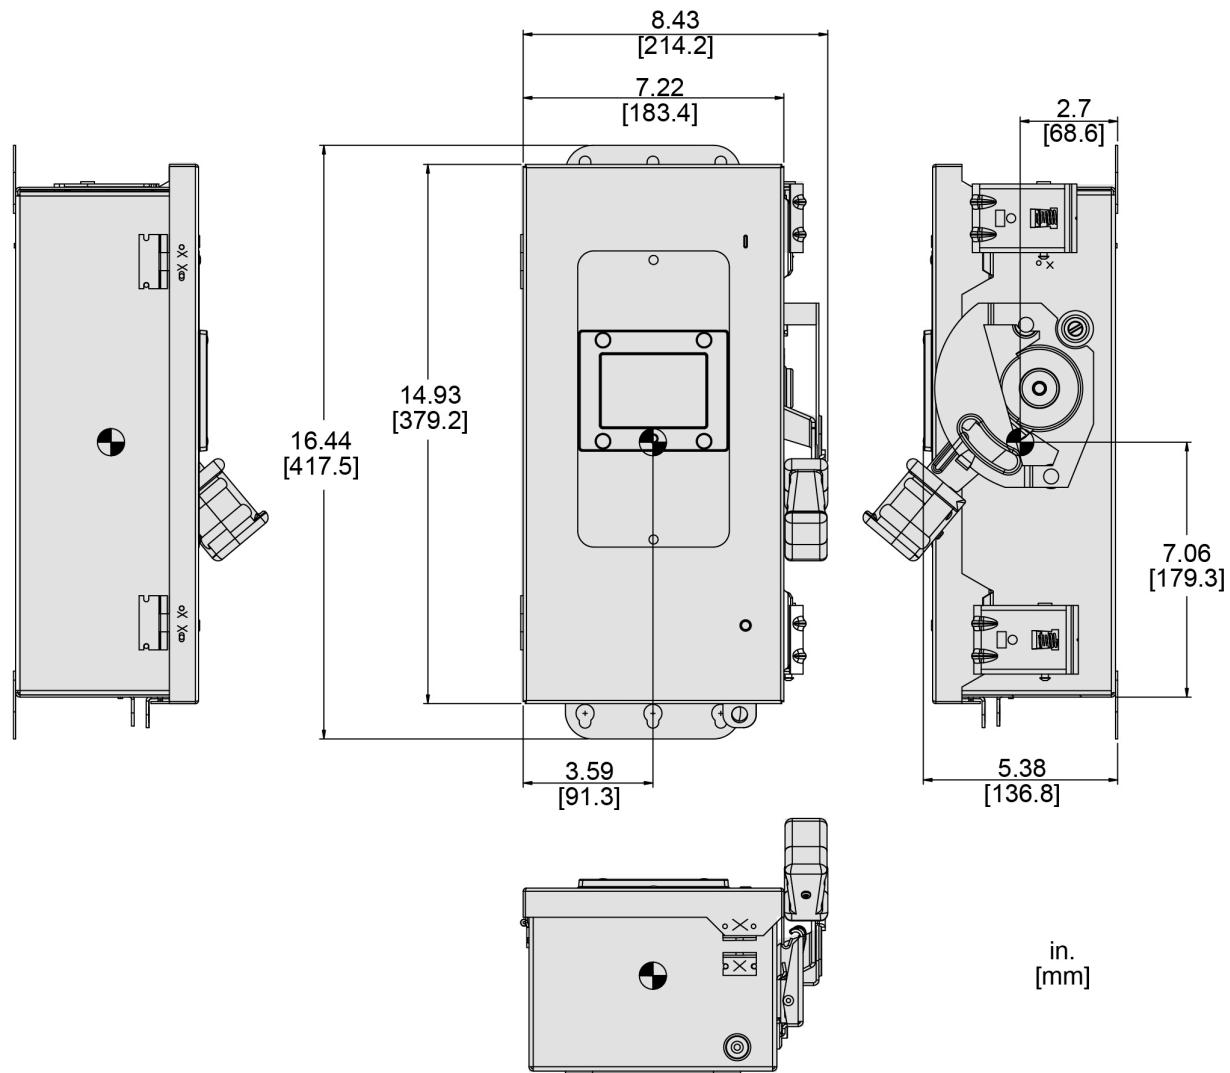
**Dimensions**

ALL DIMENSIONS ARE APPROXIMATE.  
REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.

Wiring Diagram

LINE SIDE

ACCEPTS: 12-2 AWG AL  
14-2 AWG CU

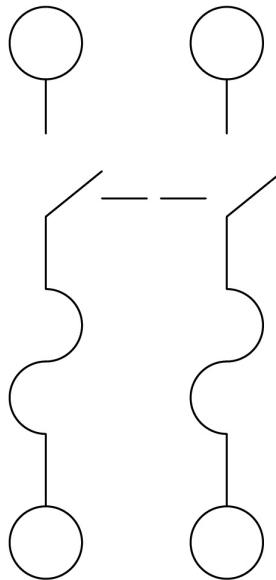

LOAD SIDE

ACCEPTS: 12-2 AWG AL  
14-2 AWG CU

REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.

**Recommended replacement(s)**