



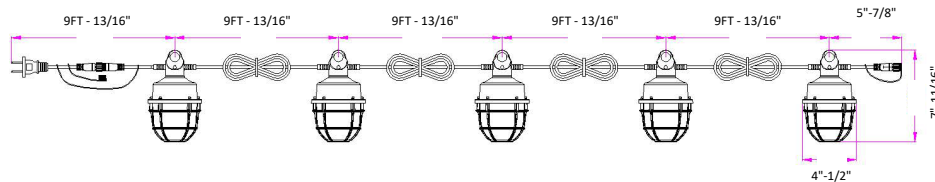

LED Temporary String Lighting

15W, 120V, 5000K

CAT#: 71189

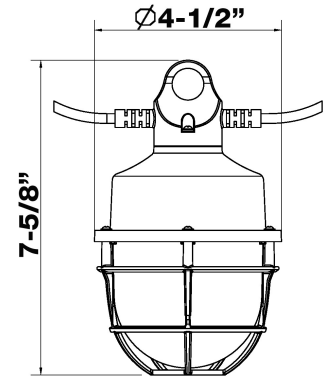


Features:

- **Heavy Duty** Diecast Aluminum Housing & Eyehook
- Heat Resistant Optics
- Polycarbonate Lens & Safety Cage
- Excellent Heat Dissipation - Maximum Life Expectancy Samsung
- LEDS Male & Female Plugs & Receptacles for wiring in series -
up to 15 sets of 5 fixture connected in series


Part#	Wattage	Volts	Lumens	CCT	CRI	Dimming	Light Pattern	Lumens/Watt	
71189	15	120	1,765	5000K	>80	N/A	160° X 360°	118	

PHOTOMETRY

Luminous Intensity Distribution Curve

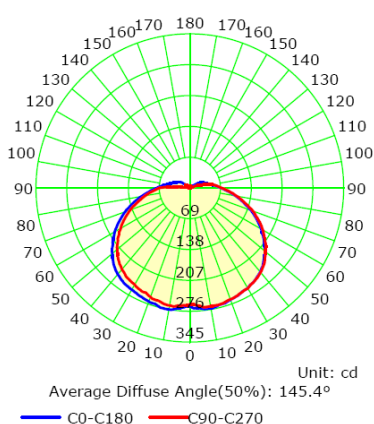

The Average Illuminance Effective Figure

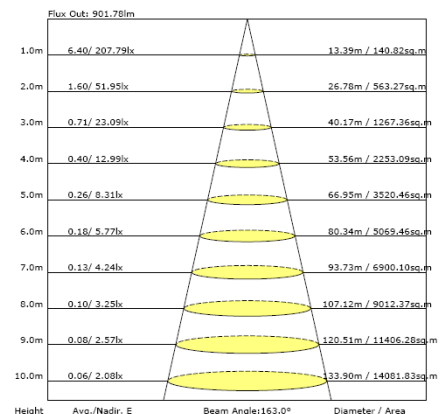



LED Temporary String Lighting

15W, 120V, 5000K

CAT#: 71189

Technical Specifications:

Electrical:

Input Voltage: 120
Current: .044A@120V
Frequency: 60Hz
Power Factor: $\geq .98$

Product Parameters:

Watts: 15
Lumens: 1,765
Efficacy: 118 lumens per watt
50,000+ Hour L70 Life Span
CCT: 5000K (Cool White)

Chromaticity Measurements:

Beam Angle: 360° H X 160° V
BUG Rating:
CRI: >80

Component Specifications:

LED: SAMSUNG
120V 50-60HZ

Dimming: N/A

Operating Temperature:

Minimum Starting -4°F - 113°F

Construction:

Housing: ADC12 Aluminum Alloy
Powder Coated
IP Rating: IP64

Lens Material: Heat Resistant Polycarbonate Lens
UV Resistant Fire Resistant

Mounting: Eye Hook Options:

Standard Hook Included

Listings: cETL

Warranty: Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).