

# Product data sheet

Specifications

SQUARE D



Load center, QO, 1 phase, 2 spaces, 4 circuits, 70A fixed main lugs, NEMA1, flush cover

QO24L70F

Product availability: Stock - Normally stocked in distribution facility

## Main

Marketing Trade Name	QO
Product Type	Load Center
Cover Type	Flush cover

## Complementary

Tightening Torque	Main lugs 35 lb.in, AWG 14...AWG 10, aluminium/copper Main lugs 45 lb.in, AWG 3, aluminium/copper Main lugs 40 lb.in, AWG 8...AWG 4, aluminium/copper Main lugs 35 lb.in, AWG 12...AWG10, aluminium/copper
PoN Convertible Mains (lugs)	Fixed Mains (lugs)
Rated Current	70 A
Number of Spaces	2
Max Short Circuit Current Rating	65 kA
Maximum Number of Single Pole Circuits	4
Maximum Number of Tandem Breakers	2
Number of Phases	1 phase 3 wires
Voltage Rating	120/240 V AC
Wire Size	AWG 12...AWG 3 aluminium AWG 14...AWG 4 copper
Ground Bar	Grounding bar (ordered separately)
Electrical Connection	Lugs
Busbar Material	Tin plated aluminium: busbar
Enclosure Material	Welded sheet steel
Surface Finish	Baked enamel Gray
Box Number	2
Height	9.3 in (236 mm)
Width	4.8 in (122 mm)

## Environment

Enclosure Rating	NEMA 1 indoor enclosure
Ambient Air Temperature for Operation	23 °F (-5 °C) 104 °F (40 °C)
Product Certifications	UL Listed

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

## Ordering and shipping details

---

Category	US1DE3A00101
Discount Schedule	DE3A
GTIN	785901785125
Returnability	Yes
Country of origin	MX

## Packing Units

---

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	4.10 in (10.414 cm)
Package 1 Width	6.40 in (16.256 cm)
Package 1 Length	11.10 in (28.194 cm)
Package weight(Lbs)	3.651 lb(US) (1.656 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	207
Package 2 Height	40.00 in (101.600 cm)
Package 2 Width	40.00 in (101.600 cm)
Package 2 Length	48.00 in (121.920 cm)
Package 2 Weight	791.775 lb(US) (359.143 kg)

## Contractual warranty

---

Warranty	18 months
----------	-----------



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

## Environmental footprint

Carbon footprint (kg CO<sub>2</sub> eq, Total Life cycle)

8

## Use Better

### Materials and Substances

Packaging made with recycled cardboard

No

Packaging without single use plastic

No

EU RoHS Directive

Under investigation

REACH Regulation

[REACH Declaration](#)

California proposition 65

**WARNING:** This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## Use Again

### Repack and remanufacture

Circularity Profile


No need of specific recycling operations

Take-back

No

## Technical Illustration


## Dimensions

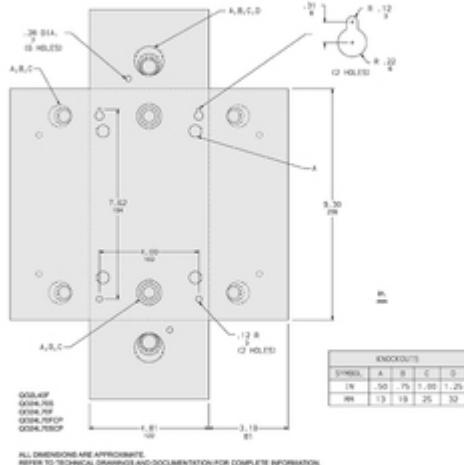

## Technical Illustration

### Wiring diagram

---



QO24L70S  
QO24L70F

QO24L70FCP  
QO24L70SCP

CP = Consumer Pack  
REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.