

WIRE MANAGEMENT

Wrap-Around Gel & UF Splice Kits

Easy-Splice™
WAGS, ESUF Series

FEATURES

Gel Splice Kits (WAGS)


- Wrap-around gel splice closure sleeves quickly insulate and seal buried electrical connections rated up to 1,000 volts.
- Engineered to handle direct burial and manhole applications, these splice enclosure sleeves are equally well suited for insulation and jacket repair.
- Simply wrap and snap the sleeve on any cable in the use range.
- The sealant gel in the sleeve seals on contract.
- The splice closure sleeve can be applied on all common compression connectors and low voltage cables, as well as in-line mechanical connectors.

UF Splice Kits (ESUF)

- Wrap-around UF splice kit provides a quick and convenient method of splicing underground feeder (UF) cable.
- Convenient wrap-around design and fast installation. No heating or waiting for compounds to cure.
- The unique sealing gel entirely encapsulates the splice, completely sealing out moisture and other contaminants.

SPECIFICATIONS

- Insulate and seal buried electrical connections rated up to 1,000 volts.
- A minimum seal length is required on each side of the connector opening or jacket damage.
- Use these guidelines for minimum seal distance:
 - WAGS-4/0 series: 1.50" each side.
 - WAGS-500 series: 2.00" each side.
 - WAGS-750 series: 3.00" each side.
- Application:** Qualified to ANSI C119.1-1986 for underground splicing.
- The UF splice kit is rated for 600V applications and it includes connector and closure.

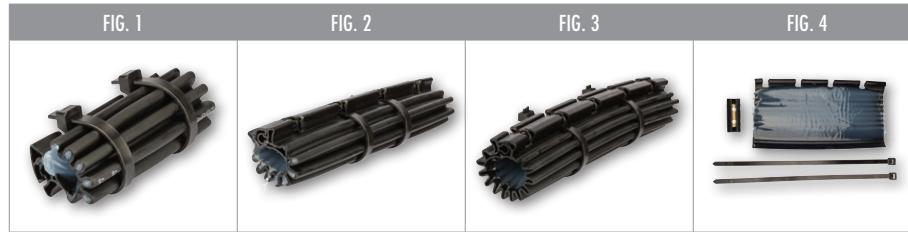

CAT. NO.	FIG. NO.	WIRE RANGE	CONDUCTOR SIZE	GENERAL USE DIA. LENGTH (IN.)	LENGTH (L) (IN.)	SLEEVE LENGTH (IN.)	MAX. CONDUCTOR OPENING (IN.)	STD. CTN. QTY.
WAGS-4/0-4	1	—	4/0-14 AWG	0.15-0.70 (4-18)	—	4.00 (100)	1.00 (25)	3
WAGS-4/0-6	1	—	4/0-14 AWG	0.15-0.70 (4-18)	—	6.00 (150)	3.00 (75)	3
WAGS-4/0-8	1	—	4/0-14 AWG	0.15-0.70 (4-18)	—	8.00 (200)	5.00 (125)	3
WAGS-4/0-10	1	—	4/0-14 AWG	0.15-0.70 (4-18)	—	10.00 (250)	7.00 (175)	3
WAGS-500-8	2	—	500 MCM-6 AWG	0.30-1.30 (10-33)	—	8.00 (200)	4.00 (100)	3
WAGS-500-10	2	—	500 MCM-6 AWG	0.30-1.30 (10-33)	—	10.00 (250)	6.00 (150)	3
WAGS-750-10	3	—	750-250 MCM	0.80-1.50 (20-38)	—	10.00 (250)	4.00 (100)	3
WAGS-750-14	3	—	750-250 MCM	0.80-1.50 (20-38)	—	14.00 (355)	4.00 (100)	3
ESUF (UL Listed)	4	14/2 To 8/3 with ground	—	—	8.000	—	—	3