

Straight Blade Devices
20 Amp, 125 Volt, 2-Pole, 3-Wire
SNAPConnect® Hospital Grade Receptacle

HUBBELL

Features

- Audible SNAP, indicates solid connection
- Reduces installation time
- Requires minimal box space
- Assembled in USA


Ordering Information

Description	Device Color	UPC Number	Catalog Number
Hospital Grade, Standard Duplex	Gray	783585540351	SNAP2182GYNA



Listings

UL Listed to UL498 File No. E2329
Certified to CSA, C22.2, No. 42 File 428
Fed. Spec. W-C-739
NEMA® WD-6 Compliant

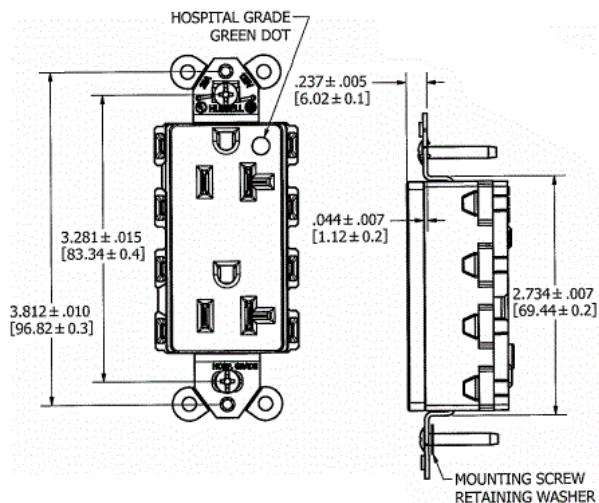

Specifications

Face	Nylon
Base	Nylon
Line Contact	Brass
Ground Contact	Brass

Performance

Electrical

Current Interrupting Certified for current interrupting at full rated

Dielectric Vc

Product Identification

Environmental	
Flammability	UL 94V-2
Operating Temperature	Maximum continuous 75°C; minimum -40°C (without impact)

Complementary Products

Wallplate or Weatherproof Cover Opening

Online Resources

Customer Sales Drawing eCatalog Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

