


MULTIPLES OF TRIP CURRENT RATING

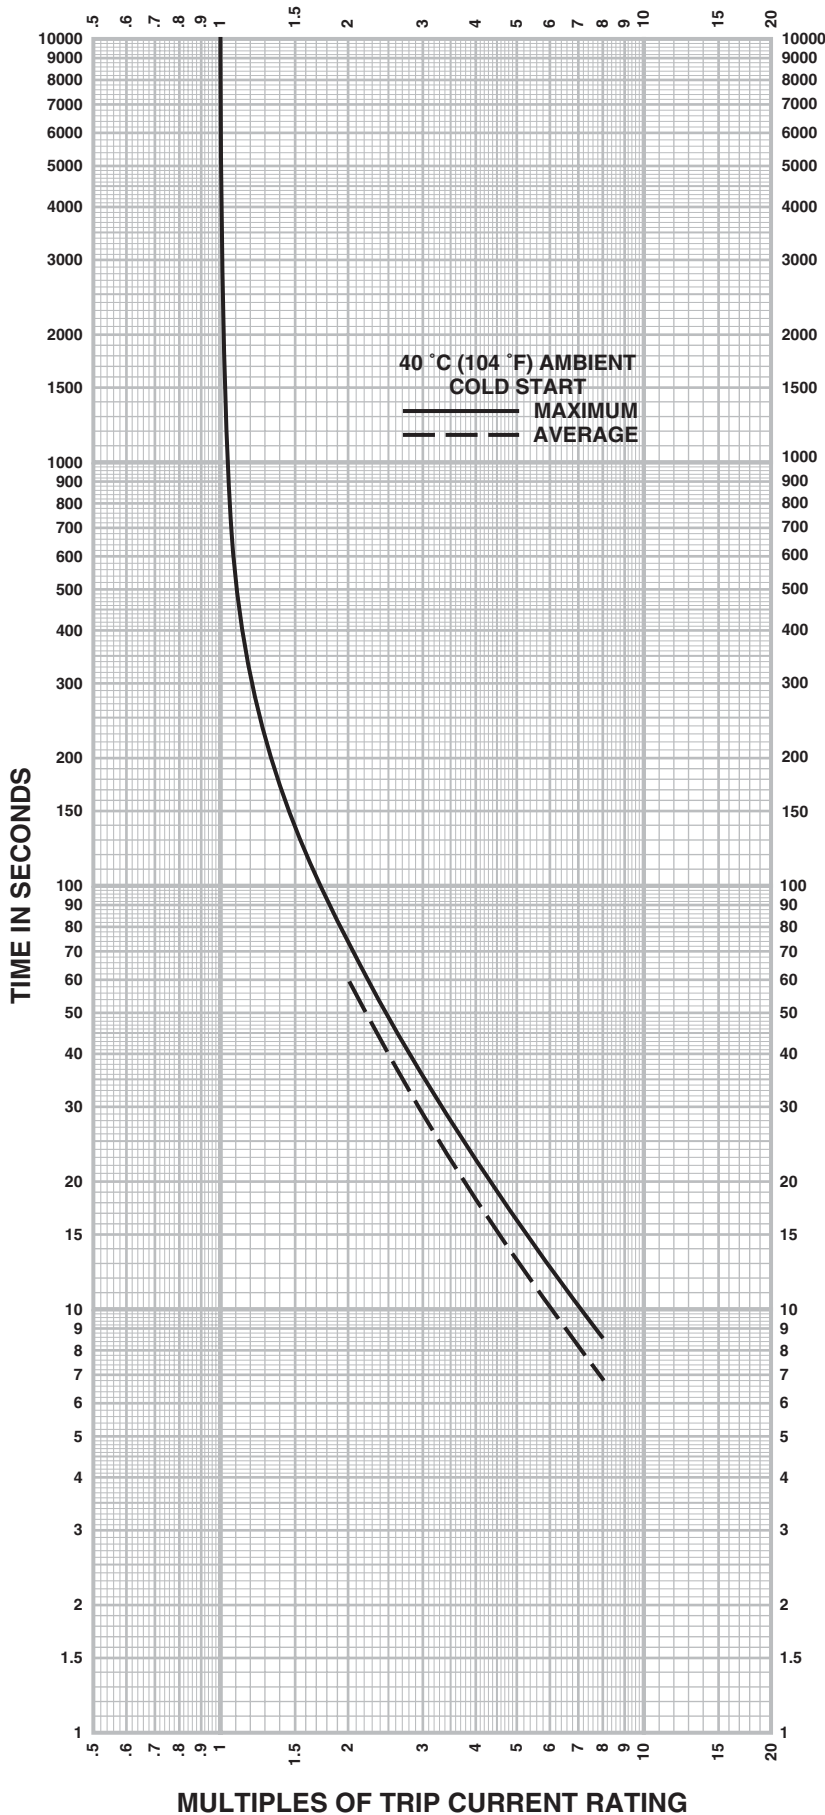

OVERLOAD RELAY TIME-CURRENT CHARACTERISTICS REFERENCE DRAWING NO. 30068-450

Relay Design	Melting Alloy
Thermal Unit Types	B0.44–B32
40 °C ambient cold start trip time characteristics of:	
Equipment	Separate Overload Relay
Size	25 A
Type	CG & CO
Series	A
Qty. of Thermal Units	1

When installed in:

- Small enclosure (Class 9065 only)
- Hinged door and all other (larger) enclosures

The trip current rating can be determined from the instructions given with the appropriate thermal unit selection table. The characteristics shown do not necessarily apply to equipment manufactured before the date of the referenced drawing.