

# Masonry Boxes

## 2-1/2" Deep

### Features

- Welded
- 2-1/2" deep
- Concentric KO's
- 6/32 Tab holes for mounting devices
- Available in 1 thru 5 gangs

### Applications

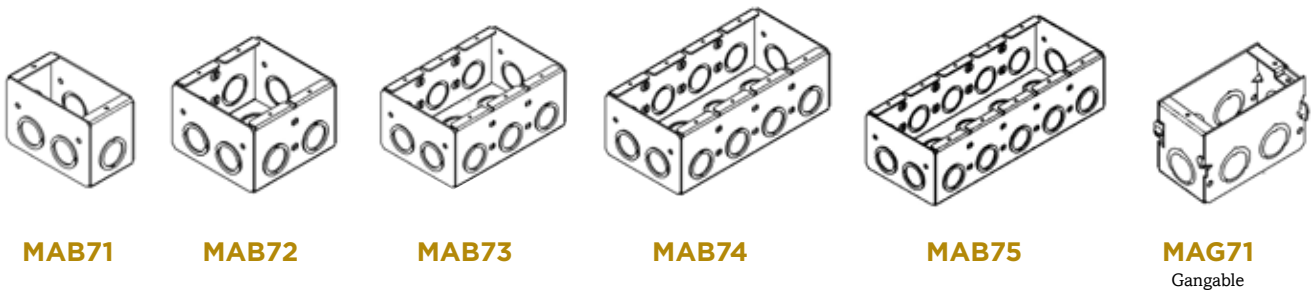
- Solid, 2-1/2" deep, multi-gang masonry boxes are used for mounting switches, plugs, outlets and other electronic and electrical devices in masonry, brick and 4 inch block walls
- Extra deep design allows for deep devices, numerous wires, switches, electronic and electrical devices

### Standard Material

- Galvanized steel



E195124

**MAB71****MAB72****MAB73****MAB74****MAB75****MAG71**  
Gangable

| Catalog Number | UPC   | Description                  | Knockouts              |                        | Cubic Inches | Ship Case | Weight/ Case |
|----------------|-------|------------------------------|------------------------|------------------------|--------------|-----------|--------------|
|                |       |                              | Sides                  | Bottom                 |              |           |              |
| <b>MAB71</b>   | 01941 | 2-1/2" deep, 1 gang          | (6) - 1/2" & 3/4" CON  | (2) - 1/2" & 3/4" CON  | 13.8         | 20        | 12           |
| <b>MAB72</b>   | 01942 | 2-1/2" deep, 2 gang          | (8) - 1/2" & 3/4" CON  | (4) - 1/2" & 3/4" CON  | 44           | 10        | 9            |
| <b>MAB73</b>   | 01943 | 2-1/2" deep, 3 gang          | (10) - 1/2" & 3/4" CON | (6) - 1/2" & 3/4" CON  | 45           | 10        | 11           |
| <b>MAB74</b>   | 01944 | 2-1/2" deep, 4 gang          | (12) - 1/2" & 3/4" CON | (8) - 1/2" & 3/4" CON  | 59           | 5         | 7            |
| <b>MAB75</b>   | 01945 | 2-1/2" deep, 5 gang          | (14) - 1/2" & 3/4" CON | (10) - 1/2" & 3/4" CON | 74           | 5         | 8            |
| <b>MAG71</b>   | 01939 | 2-1/2" deep, 1 gang gangable | (6) - 1/2" & 3/4" CON  | (2) - 1/2" & 3/4" CON  | 14           | 20        | 12           |