

# Product data sheet

## Characteristics

# GV2AF3

TeSys GV2, interconnection block, to connect GV2 and LC1D09 to D38 contactor



### Main

Range	Linergy
Product name	FT
Device short name	GV2AF
Product or Component Type	Combination block
Accessory / separate part category	Connection accessory
Range compatibility	TeSys GV2 TeSys Deca

### Complementary

Product Compatibility	LC1D09...D38
Poles description	3P
[Ie] rated operational current	32 A
Quantity per Set	Set of 10
Net Weight	0.04 lb(US) (0.016 kg)

### Ordering and shipping details

Category	22367-MANUAL STR PROTECTOR - GV2
Discount Schedule	I11
GTIN	3389110569063
Returnability	Yes
Country of origin	FR

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.74 in (9.500 cm)
Package 1 Width	3.94 in (10.000 cm)
Package 1 Length	5.91 in (15.000 cm)
Package 1 Weight	0.78 oz (22.000 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	3.74 in (9.500 cm)
Package 2 Width	3.94 in (10.000 cm)
Package 2 Length	5.91 in (15.000 cm)
Package 2 Weight	9.45 oz (268.000 g)
Unit Type of Package 3	S03
Number of Units in Package 3	140
Package 3 Height	11.81 in (30.000 cm)
Package 3 Width	11.81 in (30.000 cm)
Package 3 Length	15.75 in (40.000 cm)
Package 3 Weight	9.25 lb(US) (4.196 kg)

## Offer Sustainability


Sustainable offer status	Green Premium product
REACH Regulation	 <a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant  <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>
RoHS exemption information	 Yes
Environmental Disclosure	 <a href="#">Product Environmental Profile</a>
Circularity Profile	 <a href="#">End Of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

## Contractual warranty

Warranty	18 months
----------	-----------


GV2AF01

Combination GV2ME + TeSys k contactor

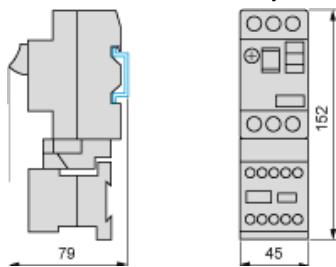


GV2AF3

Combination GV2ME + TeSys d contactor

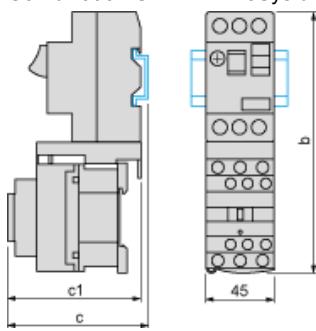

GV2ME +	LC1D09...D18	LC1D25 and D32
b	176.4	186.8
c1	94.1	100.4
c	99.6	105.9

Combination GV2P + TeSys d contactor

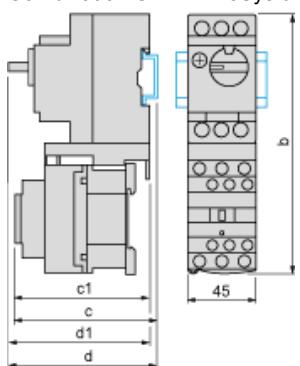

GV2P +	LC1D09...D18	LC1D25 and D32
b	176.4	186.8
c1	100.1	106.4
c	105.6	111.9
d1	95	95
d	100.5	100.5