

Product data sheet

Specifications

SQUARE D



Circuit breaker enclosure, QO, 1 phase, 2 spaces, 100A, NEMA1, flush cover, UL

QO2100BNF

Product availability: Stock - Normally stocked in distribution facility

Main

Product Type	Enclosure
Range of Product	QO

Complementary

Current Rating	100 A
Interrupt Rating	22 kA
Number of Spaces	2
Maximum Number of Single Pole Circuits	2
Maximum Number of Tandem Breakers	0
Number of Phases	1 phase
Enclosure Rating	NEMA 1 indoor
Breaker Compatibility	Circuit breaker QO 2P
Product Certifications	UL Listed
Wiring Configuration	3-wire
Electrical Connection	Lugs
Wire Size	AWG 14...AWG 1 copper AWG 12...AWG 1 aluminium
Surface Finish	Baked enamel Gray
Busbar Material	Tin plated copper: busbar
Tightening Torque	35 lb.in, AWG 14...AWG 10, copper 35 lb.in, AWG 12...AWG10, aluminium 40 lb.in, AWG 8...AWG 4, aluminium/copper 50 lb.in, AWG 3...AWG 2, aluminium/copper Main lugs 50 lb.in, AWG 3...AWG 1, aluminium/copper
Box Number	13
Cover Type	Flush cover
Ground Bar	Grounding bar (ordered separately)
Enclosure Material	Welded sheet steel
Enclosure Type	Enclosure
Height	13.1 in (333 mm)
Width	5.9 in (149 mm)
Depth	3.4 in (86.4 mm)

Ordering and shipping details

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Category	US1DE2A00005
Discount Schedule	DE2A
GTIN	785901051725
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	4.400 in (11.176 cm)
Package 1 Width	7.600 in (19.304 cm)
Package 1 Length	15.000 in (38.100 cm)
Package weight(Lbs)	5.809 lb(US) (2.635 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	135
Package 2 Height	40.000 in (101.600 cm)
Package 2 Width	40.000 in (101.600 cm)
Package 2 Length	48.000 in (121.920 cm)
Package 2 Weight	790.0007 lb(US) (358.338 kg)

Contractual warranty

Warranty	18 months
-----------------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better


 Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Compliant
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

 Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No

Technical Illustration

Dimensions

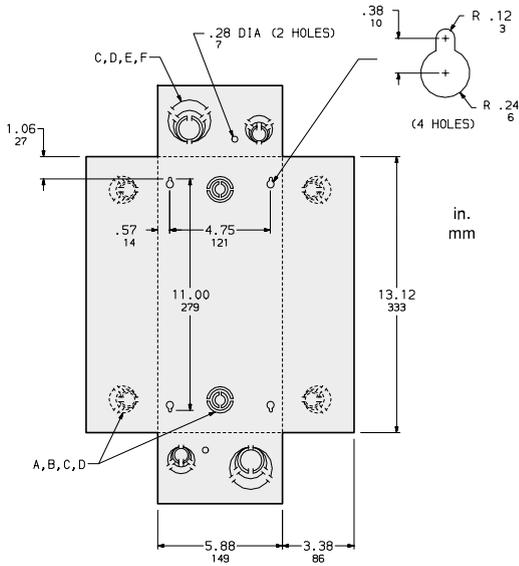


KNOCKOUTS						
SYMBOL	A	B	C	D	E	F
IN	.50	.75	1.00	1.25	1.50	2.00
MM	13	19	25	32	38	51

All dimensions are approximate. Also see technical documentation.

Technical Illustration

Wiring diagram



120/240VAC

QO2100BNF
QO2100BNS
QO2100BNRB