


## TradeSelect, Straight Blade Devices, Receptacles, Residential Grade, Single, 15A 125V, 2-Pole 3-Wire Grounding, 5-15R, Ivory

By Hubbell Wiring Device-Kellems  
Catalog # [RR151I](#)

tradeSELECT® Straight Blade Receptacle Single 15A

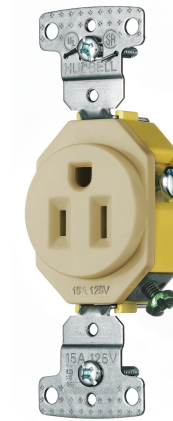

### Features

- Smooth indented face appearance
- Multiple-drive Slot/Phillips/Robertson head screws
- Tough thermoplastic ultrasonically welded cover and base

### Application

Residential Receptacles

### Performance

Environmental - Operating temperature - -20°C to 60°C,  
Mechanical - Terminal - Terminal screws accepts up to #12 AWG,  
Push wire designed for #14 AWG solid copper wire only

### Specifications

Environmental Conditions	Indoor Dry Unless Protected By Additional Means
EU RoHS Indicator	Yes
Nema Rating	5-15R

### Conductor

Number Of Wires	3-Wire Grounding
Wire Size	#14 AWG to #12 AWG
Number Of Poles	2-Pole

### Current

Current Rating	15 A
Amperage Rating	15 A
Voltage Rating Description	125 VAC

Phase	Single Phase
Current / Amperage Rating	15 A
Connectivity	Side Wired
Wattage	1875
Voltage Rating	125 VAC

### Dimensions

Display Size	Standard Sized Product
--------------	------------------------

### General

Color	Ivory
Item Type	Single
Material - Mounting Hardware	Screw Mounting
Material Specifications	Thermoplastic
	<ul style="list-style-type: none"> <li>• Material - Thermoplastic</li> <li>• Number of Poles - 2 Pole</li> <li>• Product Type - Receptacle</li> <li>• Receptacle Type - Single</li> </ul>
UPC	883778100222

### Logistics

Carton Quantity	10
Pallet Quantity	8500

### Product Assets

- [Catalog \[English\]](#)
- [Catalog Page \[English\]](#)
- [Catalog Page \[English\]](#)
- [Installation Manual \[Spanish, French, English\]](#)