

Rigid Conduit Bodies

Threaded T Type - Hot Dip Galvanized

Features

- Hot dip galvanized finish provides superior protection against severe environmental factors

Applications

- Compatible with all Form 5 & Form 35 series conduit bodies and covers
- Provides taps for branch conduit runs
- Enables 90 degree bends in conduit runs

Standard Material


- Malleable iron

Standard Finish

- Hot dip galvanized



Conforms to finish thickness ASTM
A123/123M
UL 514A and UL 514D
Fed. Spec. A-A-50563
NEMA FB 1

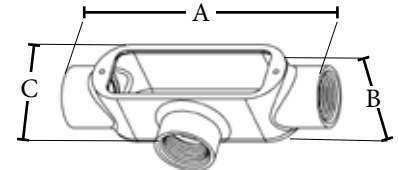

Catalog Number	UPC	Size	Wire Size		Internal Volume (in ³)	Ship Case	Weight/Case	Inches		
			Max. Number	Max. Size				A	B	C
T1MHDG	86653	1/2"	---	---	4	10	9	5.35	1.31	2.02
T2MHDG	86654	3/4"	3	6 AWG	7	10	11	6	1.62	2.22
T3MHDG	86655	1"	3	4 AWG	12	5	8	7.06	1.88	2.56
T4MHDG	86656	1-1/4"	3	2 AWG	33	5	14	7.25	2.50	3.50
T5MHDG	86657	1-1/2"	3	1 AWG	36	2	6	9.25	2.67	3.50
T6MHDG	86658	2"	3	2/0 AWG	76	1	6	11.50	3.29	4.25
T7MHDG	86659	2-1/2"	3	300 MCM	146	1	12	15	3.94	5.72
T8MHDG	86660	3"	3	300 MCM	185	1	15	15.125	4.75	8.88
T9MHDG	86661	3-1/2"	3	350 MCM	300	1	27	18.125	5.20	6.81
T10MHDG	86662	4"	3	350 MCM	330	1	28	18.125	5.56	7.20