

# Product data sheet

## Characteristics


V3

TeSys VARIO - Switch body for switch-disconnector - 3 poles - 63 A

Product availability : Stock - Normally stocked in distribution facility



Price\* : 179.00 USD

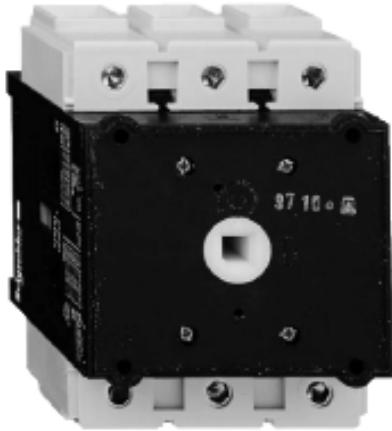

### Main

Range	TeSys
Product name	TeSys VARIO
Device short name	V
Product or component type	Switch body
Performance level	High performance
Poles description	3P
Contacts type and composition	3 NO
Network type	AC DC
Network frequency	50/60 Hz
Suitability for isolation	Yes

### Complementary

Mounting support	Plate Symmetrical rail
System Voltage	690 V AC 50/60 Hz
[Uiimp] rated impulse withstand voltage	8 kV
[Ith] conventional free air thermal current	63 A
[Ithe] conventional enclosed thermal current	50 A
[Ie] rated operational current	41.5 A (AC-23) at 400 V
Rated operational power in W	11 kW at 230...240 V (AC-3) 22 kW at 500 V (AC-3) 22 kW at 690 V (AC-23A) 30 kW at 500 V (AC-23A) 18.5 kW at 400...415 V (AC-3) 18.5 kW at 690 V (AC-3) 15 kW at 230...240 V (AC-23A)

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

	22 kW at 400...415 V (AC-23A)
Intermittent duty class	30
Making capacity	630 A at 400 V] (AC-21A) 630 A at 400 V] (AC-22A) 630 A at 400 V] (AC-23A)
[Icm] rated short-circuit making capacity	2.1 kA at 400 V at Ipeak
[Icw] rated short-time withstand current	756 A at 400 V during 1 s
Rated conditional short-circuit current	10 kA at 400 V - associated fuse 63 A aM 10 kA at 400 V - associated fuse 63 A gG
Breaking capacity	500 A at 400 V AC-21A 500 A at 400 V AC-22A 500 A at 400 V AC-23A
Mechanical durability	30000 cycles
Electrical durability	30000 cycles DC-1...5 30000 cycles AC-21
Connections - terminals	Power circuit: screw clamp terminals cable 0.02 in <sup>2</sup> (16 mm <sup>2</sup> ) - cable stiffness: flexible - with cable end Power circuit: screw clamp terminals cable 0.04 in <sup>2</sup> (25 mm <sup>2</sup> ) - cable stiffness: solid
Tightening torque	Power circuit: 35.4 lbf.in (4 N.m) - on screw clamp terminals
Height	3.27 in (83 mm)
Width	2.36 in (60 mm)
Depth	2.56 in (65 mm)
Product weight	1.1 lb(US) (0.5 kg)

## Environment

Standards	IEC 60947-3
Product certifications	CSA GL UL
Protective treatment	TC
IP degree of protection	IP20 conforming to IEC 60529
Mechanical robustness	Vibrations 10...150 Hz 1 gn IEC 60068-2-6 Shocks 11 ms 30 Gn IEC 60068-2-27
Ambient air temperature for operation	-4...122 °F (-20...50 °C)
Fire resistance	1760 °F (960 °C) conforming to IEC 60695-2-1

## Ordering and shipping details

Category	21730 - V VARIO SWITCH
Discount Schedule	CP1
GTIN	00785901305590
Nbr. of units in pkg.	1
Package weight(Lbs)	0.6500000000000002
Returnability	Y
Country of origin	CZ

## Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0730 - Schneider Electric declaration of conformity <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference not containing SVHC above the threshold <a href="#">Reference not containing SVHC above the threshold</a>
Product environmental profile	Available
Product end of life instructions	Need no specific recycling operations

## Contractual warranty

---

Warranty period	18 months
-----------------	-----------

---