


-SAFETY ALERT-

PLEASE READ INSTRUCTIONS THOROUGHLY
BEFORE REPLACING MODULE.

①




CAUTION: TURN OFF POWER

②



Remove Screw.

③

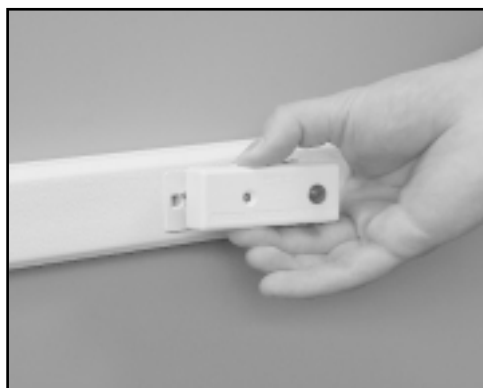

Grip module at screw end and
pull straight out of Plugmold.

④



④a




If cover of module is pulled off, then gently grip
the printed circuit board and pull straight out.

⑤



Discard entire module.

⑥

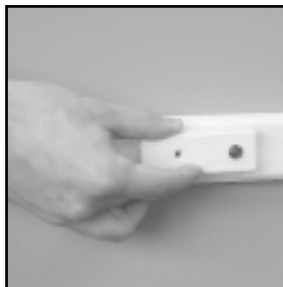

⑥a



Plug in new module and fasten screw.

**If you have any questions, please contact
Shawn Stempinski at 800-338-1315 x3807 or
email at shawn.stempinski@wiremold.com**