

**PHILIPS****Lighting**

# LED Glass HID lamps

## 25GC/LED/850/ND E26 BB 6/1

Philips Glass HID lamps offer you an easy, short-payback LED solution to replace High Intensity Discharge (HID) lamps. Thanks to our High-Power LED filament technology, this new generation of indoor/outdoor glass lamps brings all the energy-efficiency and long-lifetime benefits of LED to HID replacement, while providing instant savings with a low initial investment. They are designed to have the same aesthetics, lamp size and light distribution as the HID lamps they are replacing, so the upgrade to LED is easier than ever!

### Product data


General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal lifetime	25,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Light Technical	
Color Code	850 [CCT of 5000K]
Beam Angle (Nom)	300 degree(s)
Luminous Flux	4,000 lm
Luminous Efficacy (rated) (Nom)	160 lm/W
Color Designation	Daylight
Correlated Color Temperature (Nom)	5000 K
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RG1
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power Consumption	
Lamp Current (Max)	200 A
Lamp Current (Min)	96 A
Lamp Current (Nom)	120 277 mA A
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	120-277 V
UL Type	HIB_UL Type B (UL Listed+Classified)
Temperature	
Ambient temperature range	-20 to +45 °C
T-Case Maximum (Nom)	47.1 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear

## LED Glass HID lamps

<b>Bulb Shape</b>	ED-23 1/2
<b>Approval and Application</b>	
EU RoHS compliant	Yes
<b>Application Conditions</b>	
can it be used in closed luminaires	Yes
<b>Product Data</b>	
Order product name	25GC/LED/850/ND E26 BB 6/1



<b>Full product name</b>	25GC/LED/850/ND E26 BB 6/1
<b>Order code</b>	929003772904
<b>Material Nr. (12NC)</b>	929003772904
<b>Numerator - Quantity Per Pack</b>	1
<b>Net Weight (Piece)</b>	0.150 kg
<b>EAN/UPC - Product/Case</b>	046677588182
<b>Numerator - Packs per outer box</b>	6
<b>EAN/UPC - Case</b>	50046677588187

## Dimensional drawing



Product	D	C
25GC/LED/850/ND E26 BB 6/1	76 mm	196 mm

## Photometric data

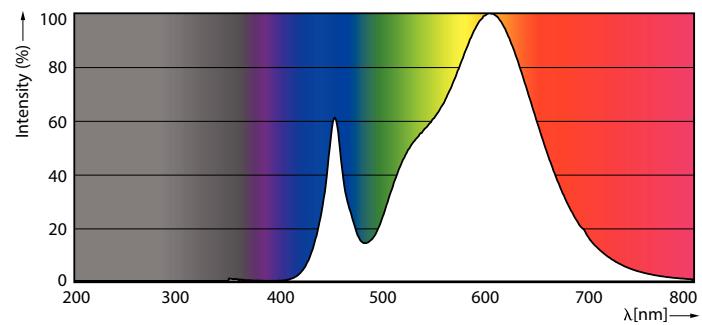


General uniform lighting - 25GC/LED/850/ND E26 BB 6/1



Spectral Power Distribution Colour - 25GC/LED/850/ND E26 BB 6/1

## LED Glass HID lamps

### Photometric data



### Lifetime

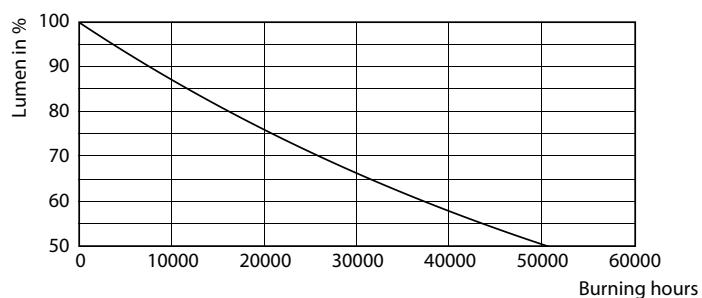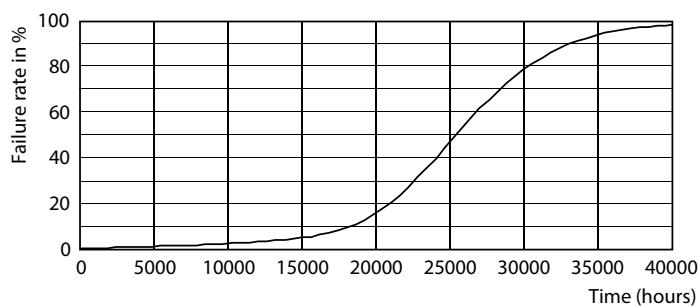

Life Expectancy Diagram

Lumen Maintenance Diagram - 25GC/LED/850/ND E26 BB 6/1

